



FORM PTG-139 (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			WDURM-003US
			U.S. APPLICATION NO. (If known, see 37 CFR 1.5)
INTERNATIONAL APPLICATION NO. PCT/AU98/01039	INTERNATIONAL FILING DATE December 17, 1998	PRIORITY DATE CLAIMED December 17, 1997	
TITLE OF INVENTION CONTAINER WITH MULTIPLE INTEGRAL CONNECTION HANDLE, PREFORM AND METHOD OF MANUFACTURE			
APPLICANT(S) FOR DO/EO/US Glenn R. Beale			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none">1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))<ol style="list-style-type: none">a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))<ol style="list-style-type: none">a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).b. <input type="checkbox"/> have been transmitted by the International Bureau.c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.d. <input checked="" type="checkbox"/> have not been made and will not be made.8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). (unsigned)10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).			
Items 11. to 16. below concern document(s) or information included:			
<ol style="list-style-type: none">11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.14. <input type="checkbox"/> A substitute specification.15. <input type="checkbox"/> A change of power of attorney and/or address letter.16. <input type="checkbox"/> Other items or information:			

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER	
09/581956		PCT/AU98/01039		wdumr-003US	

17. ☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO..... \$970.00

International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$760.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	54 - 20 =	34	X \$18.00	\$	612
Independent claims	5 - 3 =	2	X \$78.00	\$	156
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$	
SUBTOTAL =				\$	1,738
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	1,738
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
TOTAL FEES ENCLOSED =				\$	1,738
				Amount to be: refunded	\$
				charged	\$

CALCULATIONS

PTO USE ONLY

a. ☒ A check in the amount of \$ 970 to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account No. 19-4330 in the amount of \$ 768 to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☐ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. _____. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Lowell Anderson

STETINA BRUNDA GARRED & BRUCKER

24221 Calle de la Louisa, 4th Floor

Laguna Hills, CA 92653-7602

SIGNATURE:

Lowell Anderson

NAME

30,990

REGISTRATION NUMBER

#3


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN	Docket Number (Optional) WDUMR-003US
<p>Applicant, Patentee, or Identifier: <u>GLENN ROBERT BEALE</u></p> <p>Application or Patent No.: <u>09/581,956</u></p> <p>Filed or Issued: <u>June 16, 2000</u></p> <p>Title: <u>CONTAINER WITH MULTIPLE INTEGRAL CONNECTION HANDLE, PREFORM AND METHOD OF MANUFACTURE</u></p> <p>I hereby state that I am <input type="checkbox"/> the owner of the small business concern identified below: <input checked="" type="checkbox"/> an official of the small business concern empowered to act on behalf of the concern identified below:</p> <p>NAME OF SMALL BUSINESS CONCERN <u>BEALETEC PTY LTD.</u></p> <p>ADDRESS OF SMALL BUSINESS CONCERN <u>16-20 BARRACK STREET, SUITE 801,</u> <u>SYDNEY, NSW 2000, AUSTRALIA</u></p> <p>I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.</p> <p>I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:</p> <p><input type="checkbox"/> the specification filed herewith with title as listed above. <input checked="" type="checkbox"/> the application identified above. <input type="checkbox"/> the patent identified above.</p> <p>If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).</p> <p>Each person, concern, or organization having any rights in the invention is listed below: <input checked="" type="checkbox"/> no such person, concern, or organization exists. <input type="checkbox"/> each such person, concern, or organization is listed below.</p> <p>Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)</p> <p>I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))</p> <p>NAME OF PERSON SIGNING <u>GLENN ROBERT BEALE</u></p> <p>TITLE OF PERSON IF OTHER THAN OWNER <u>DIRECTOR</u> <u>PRESIDENT, BEALETEC PTY LTD.</u></p> <p>ADDRESS OF PERSON SIGNING <u>9 Conway Place Kings Langley, NSW, AUSTRALIA</u></p> <p>SIGNATURE <u>[Signature]</u> DATE <u>19/9/2000</u></p>	

09/581956

Case **WDUMR-003US**
Patent Appln.
Express Mail:

534 Rec'd PCT/PTC 16 JUN 2000

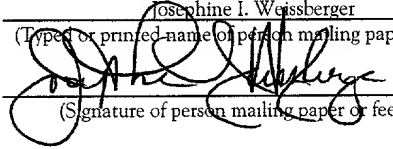Express Mail mailing label number EL538732236US
Date of Deposit June 16, 2000
I hereby certify that this paper or fee is being deposited with the
United States Postal Service EXPRESS Mail Post Office to
Addressee service under 37 CFR 1.10 on the date indicated above
and is addressed to Box PATENT APPLICATION, Assistant
Commissioner for Patents, Washington, D.C. 20231
Josephine I. Weissberger
(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Glenn Robert Beale)
Serial No.: Unknown) Group No.: Unknown
Filed: Herewith) Examiner: Unknown
For: **CONTAINER WITH**)
MULTIPLE INTEGRAL)
CONNECTION)
HANDLE, PREFORM)
AND METHOD OF)
MANUFACTURE)

PRELIMINARY AMENDMENT

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir/Madam:

Prior to initial examination of the subject application, please enter the following preliminary amendment to delete multiple dependent claims.

IN THE CLAIMS:

In Claim 9, first line, delete “or 8”.

In Claim 10, first line, delete “or 8”.

In Claim 17, first line, delete “any one of claims 12 to 16” and insert therefore –Claim 2, and”.

In Claim 19, first line, delete “1 or”.

In Claim 20, first line, delete “18 or”.

In Claim 21, first line, delete “any one of Claims 18-20” and insert therefore –Claim 20--.

In Claim 24, first line, delete “any one of Claims 18-23 and” and insert therefore –Claim 23--.

In Claim 25, first line, delete “any one of Claims 18-24 and” and insert therefore –Claim 24--.

In Claim 26, first line, delete “or Claim 25”.

In Claim 27, first line, delete “any one of Claims 18-26” and insert therefore –Claim 26--.

In Claim 29, first line, delete “any one of Claims 18-28” and insert therefore –Claim 18--.

In Claim 30, first line, delete “any one of Claims 18-29” and insert therefore –Claim 18--.

In Claim 36, first line, delete “34 or 35”.

In Claim 40, first line, delete “or claim 38”.

In Claim 49, first line, delete "any one of claims 33-48" and insert therefore -Claim 48--.

In Claim 49, second line, delete "as defined in the specification".

In Claim 51, first line, delete " Claim 50".

In Claim 52, first line, delete "any one of Claims 33 to 51" and insert therefore -Claim 51--.

Please delete Claims 55-60.


REMARKS

The Amendments are to delete multiple dependent claims. No new matter is added.

Respectfully submitted,

Date: _____

By: _____



Lowell Anderson

Customer No.: 007663

Registration No. 30,990

STETINA BRUNDA GARRED & BRUCKER

24221 Calle de la Louisa

4th Floor

Laguna Hills, CA 92653-3642

(949) 855-1246

CONTAINER WITH MULTIPLE INTEGRAL CONNECTION
HANDLE, PREFORM AND METHOD OF MANUFACTURE

5 **INTRODUCTION**

This invention relates to a container with an integrally connected handle, preform from which the container is biaxially blown and a method of manufacture thereof and more particularly to a preform and resulting container having a handle integrally connected at at least two separate points.

10

BACKGROUND OF THE INVENTION

Attempts have been made to incorporate integral handles in PET and like injection blow moulded containers - for example see US 4,629,598 to Thompson, assigned to Tri-Tech Systems International, Inc. The parison or preform from which
15 the handled bottles of US 4,629,598 are produced is illustrated in Fig. 1. To date, however, attempts to produce a practical, mass produced version of this arrangement have been unsuccessful. Instead, the best that appears to have been done in commercial practice is an arrangement whereby the blown containers are arranged to accept a clip on or snap on handle in a separate production step after the container
20 itself is formed. See for example WO82/02371 and WO82/02370, both to Thompson.

Injection-stretch-blow moulding is a process in which the parison is stretched both axially and radially, resulting in biaxial orientation.

Biaxial orientation provides increased tensile strength (top load), less permeation due to tighter alignment of the molecules, and improved drop impact,
25 clarity, and lightweighting of the container.

Not all thermoplastics can be oriented. The major thermoplastics used are polyethylene terephthalate (PET), polyacrylonitrile (PAN), polyvinyl chloride (PVC), and polypropylene (PP). PET is by far the largest volume material, followed by PVC, PP, and PAN.

30 The amorphous materials, e.g., PET, with a wide range of thermoplasticity are easier to stretch-blow than the partially crystalline types such as PP. Approximate melt and stretch temperatures to yield maximum container properties are:

Material	Melt, Degrees C.	Stretch, Degrees C.
PET	280	107
PVC	180	120
PAN	210	120
PP	240	160

There are basically two types of processes for stretch-blow moulding: 1) single-stage in which preforms are made and bottles blown on the same machine, and
5 2) two-stage in which preforms are made on one machine and blown later on another machine.

Single-stage equipment is capable of processing PVC, PET, and PP. Once the parison is formed (either extruded or injection moulded), it passes through conditioning stations which bring it to the proper orientation temperature. The single-
10 stage system allows the process to proceed from raw material to finished product in one machine, but since tooling cannot be easily changed, the process is best suited for dedicated applications and low volumes.

Oriented PVC containers most commonly are made on single-stage, extrusion-type machines. The parison is extruded on either single- or double-head units.
15 Temperature conditioning, stretching, and thread forming are done in a variety of ways depending on the design of the machine. Many of the processes presently in use are proprietary.

Many oriented PET containers are produced on single-stage machines. Preforms are first injection moulded, then transferred to a temperature conditioning
20 station, then to the blow moulding operation where the preforms are stretch-blown into bottles, and finally to an eject station.

With the two-stage process, processing parameters for both preform manufacturing and bottle blowing can be optimized. A processor does not have to make compromises for preform design and weight, production rates, and bottle quality
25 as he does on single-stage equipment. He can either make or buy preforms. And if he chooses to make them, he can do so in one or more locations suitable to his market. Both high-output machines and low output machines are available. Heretofor two stage extrusion-type machines generally have been used to make oriented PP bottles.

In a typical process, preforms are re-extruded, cooled, cut to length, reheated, stretched while the neck finish is being trimmed, and ejected.

It is an object of the present invention to produce a practical, readily implementable injection, stretch blow moulded container made from an orientable plastics preform material incorporating a handle joined in a loop at at least two points to the preform.

SUMMARY OF THE INVENTION

Accordingly in one broad form of the invention there is provided a preform for a container comprised of orientable plastics material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a moulded structure having a neck portion and an expandable portion below the neck, at least one loop of orientable plastics material integrally connected at both a first end and a second end to a respective first location and a separate second location on said preform which when the container is formed constitutes said handle.

In a further broad form of the invention there is provided a method of forming a container having an integral handle; said method comprising:

(a) forming a preform having a neck portion and an expandable portion below the neck portion, said preform having at least one loop of orientable plastics material integrally connected at both a first end and a second end to a respective first location and a separate second location on said preform, and

(b) performing a blow moulding operation on said preform to expand the expandable portion to form the body of the container.

In yet a further broad form of the invention there is provided a method of production as a two step process of an integral handle PET container from a preform which has a loop of orientable plastics material at least one loop of orientable plastics material integrally connected at both a first end and a second end to a respective first location and a separate second location on said preform ; said method including the step of shrouding said loop of said preform during preheating of said preform preparatory to a stretch blow moulding step.

In yet a further broad form of the invention there is provided a container

comprised of biaxially orientable plastics material manufactured from a two stage injection stretch blow moulding process; said two stage process comprising a first stage in which a preform is manufactured and a second stage in which said preform is reheated and biaxially stretched to form said container; said container including a graspable handle integrally affixed at at least a first point of connection and a second point of connection to said container so as to form an enclosed area between said handle and said container and through which at least two fingers of a human hand can pass.

In yet a further broad form of the invention there is provided an injection machine for the manufacture of a parison or preform as described above in a first stage of a two stage process.

In yet a further broad form of the invention there is provided a stretch blow moulding machine for the manufacture of a container having an integral handle, said machine operable according to the method described above.

In yet a further broad form of the invention there is provided an injection machine for the manufacture of preforms having integral handles incorporated therein; said machine including moulds having a channel which permits PET material to flow into a stem portion which constitutes a handle in a container blown from a preform produced by said injection moulding machine.

Preferably said channel of said mould includes a return portion whereby said stem is connected integrally at two points on said preform.

In yet a further broad form of the invention there is provided an injection blow moulding machine incorporating heat insulating means to insulate handle portions of preforms during heating of said preforms prior to stretch blow moulding thereof.

Preferably said insulating means comprises a shroud.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described by way of example, with reference to the accompanying drawings, in which:

Fig. 1 is a side view of a prior art parison,

Fig. 2 is a side view of a parison incorporating features usable with embodiments of

the present invention,

Fig. 3 is a partial side elevational view of a blow moulded PET container formed from a preform usable with one embodiment of the invention;

Fig. 4 illustrates the steps of formation of a parison usable with another embodiment
5 of the invention.

Fig. 5A is a side view of a preform according to a further embodiment of the invention;

Fig. 5B is a side view of a container formed from the preform of Fig. 5A.

Fig. 6 is a side view of a die in open position for manufacture of a preform;

10 Fig. 7 is the die of Fig. 6 in closed position;

Fig. 8 is a side view of the die of Figs. 6 and 7 showing the stem of the preform located therein,

Fig. 9 is a top view of a two stage injection, blow mould machine adapted to receive preforms and biaxially orient them into blown containers according to embodiments
15 of the invention,

Fig. 10 is a side section view of a lifting, lowering and rotating mechanism for handle covers for use with the machine of Fig. 9,

Fig. 11 is an alternative side section view of the mechanism of Fig. 10,

Fig. 12 is a side section, close up view of the machine of Fig. 9 showing a preform
20 with handle cover lowered over the handle portion thereof,

Fig. 13A,B illustrates first and second side section views of a preform adapted for loading into the machine of Fig. 9,

Fig. 14 is a perspective view of the preform of Fig. 13,

Fig. 15 is a perspective view of a container blown from the preform of Fig. 14 on the
25 machine of Fig. 9,

Fig. 16 is a plan view of a half mould adapted for blowing preforms on the machine of Fig. 9,

Fig. 17 is a top view of the mould of Fig. 16 with a preform inserted therein ready for blowing on the machine of Fig. 9,

30 Fig. 18 is a bottom view of Fig. 17 with both half moulds in opposed relationship,

Fig. 19 is a further bottom view of Fig. 17 showing the preform in the position of Fig.

17,

Fig. 20 is a section view through the half mould of Fig. 16,

Fig. 21 is a section view through the mould of Fig. 16,

Fig. 22 is a side view of the container of Fig. 15 blown in the mould of Fig. 19 from a
5 preform as illustrated in Fig. 13 and 14,

Fig. 23 is a detail, side section view of the neck and top handle portion of the
container of Fig. 22,

Fig. 24 is a side view of a preform incorporating an enlarged first non-expanding
region usable with embodiments of the invention,

10 Fig. 25 is an alternative side view of the preform of Fig. 24,

Fig. 26 is a side view of a container blown from the preform of Fig. 24 on the machine
of Fig. 9,

Fig. 27 is a perspective view of the preform of Fig. 24,

Fig. 28 is a perspective view of the container of Fig. 26,

15 Fig. 29 is a side view of yet a further alternative embodiment of a preform
incorporating a lengthened or enlarged first non-expanding zone and adapted for
blowing on the machine of Fig. 9,

Fig. 30 is a side view of a container blown from the preform of Fig. 29 on the machine
of Fig. 9,

20 Fig. 31 is a plan view of a half mould for blowing the preform of Fig. 24,

Fig. 32 is a plan view of the half mould of Fig. 31 with the preform of Fig. 24 inserted
therein ready for blowing on the machine of Fig. 9,

Fig. 33 is a side section view of a container blown in the mould of Fig. 32 and

Fig. 34 is a detail side section view of the neck and top handle portion of the container
25 of Fig. 33.

Fig. 35 is a first perspective view of a container usable with embodiments of the
invention particularly adapted to resist high internal pressures,

Fig. 36 is a second perspective view of the container of Fig. 35,

Fig. 37 is a first side view of the container of Fig. 35,

30 Fig. 38 is a second side view of the container of Fig. 35,

Fig. 39 is a plan view of the container of Fig. 35,

Fig. 40 is a side view of a preform from which the container of Fig. 35 can be blown,
Fig. 41 is a perspective view of the preform of Fig. 40,
Fig. 42 is a perspective view of a container with strap connected handle according to
an embodiment of the invention, and

- 5 Fig. 43 is a side view of a preform from which the container of Fig. 42 can be blown.
Fig. 44 is a side section view of a preform having a multiple integral connection
handle according to an embodiment of the invention,
Fig. 45 is a side section view of the resulting container blown from the preform of Fig.
44,

- 10 Fig. 46 is a side section view of an alternative embodiment of a container having a
multiple integral connection handle,
Fig. 47 is a side section view of a preform having a multiple integral connection
handle according to a further embodiment of the invention,
Fig. 48 is a side section view of a preform having a multiple integral connection
15 handle according to a further embodiment of the invention,
Fig. 49 is a perspective view of the preform of Fig. 48,
Fig. 50 is a perspective view of a container blown from the preform of Fig. 48,
Fig. 51 is a top view of the container of Fig. 50, and
Fig. 52 is a bottom view of the container of Fig. 50.

20

DETAILED DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a prior art preform or parison by way of introduction.

- Figs 2 through to 41 illustrate preform and resulting containers and methods of
manufacture thereof and machinery for manufacture thereof which can be adapted
25 according to embodiments of the invention to include multiple integral connection of
the handle stem or loop to the preform and resulting container.

- In this specification the term "integral connection" or "integrally connected"
means a connection between the handle and the preform (and subsequently the
corresponding connection on the container blown from the preform) which is made
30 from the same material as the handle and the preform and is formed as an inherent
part of an at the same time as the preform is formed.

All embodiments of the invention are produced in a two stage process.

The two-stage process is the lowest-cost method to produce oriented PET containers. The two-stage process, which provides injection moulding of the preform and then shipping to blow moulding locations, allows companies to become preform
5 producers and to sell to blow moulding producers. Thus companies that wish to enter the market with oriented PET containers can minimise their capital requirements. Two-stage stretch-blow moulding also can be used for production of oriented PVC containers. Preform design and its relationship to the final container remains the most critical factor. The proper stretch ratios in the axial and hoop directions are important
10 if the container is to properly package its intended product. Exemplary ratios are as follows:-

Material	Stretch Ratios	Orientation Temp.Deg.F
PET	16/1	195-240
PVC	7/1	210-240
PAN	9/1	220-260
PP	6/1	260-280

A container 10 usable with an embodiment of the invention is shown in Fig. 3. It includes a neck 11 and an expanded portion 12.

15 The neck 11 has a threaded portion 13 and a locating ring 14. Moulded integrally with the ring 14 is a stem 15 having a first portion 15a extending outwardly from the ring 14 and a second portion 15b so inclined to the first portion 15a that it is nearly parallel to a vertical axis of the container 10. In this instance, the first portion 15a subtends an angle of slightly more than 45° to the wall 20 and the second portion
20 subtends an angle of about 20° to the wall 20.

The particular shape of the stem 15 is selected so that when formed as a handle it may be grasped by fingers of the human hand.

The stem 15 terminates in a stem end 16 which faces generally downwardly in the general direction of closed end of the container 10.

25 In this instance, the stem 15 is of I-shaped cross-section to combat unwanted effects arising at or near junction 17 of stem 15 with the ring 14 following a blowing operation on the preform 10.

These unwanted effects particularly include stress effects and air inclusions

resulting from non-uniform cooling through preform volumes of differing cross-section.

In this arrangement, the preform is made from PET and is prepared utilizing a heated mould.

5 In order to produce the container 10, the parison or preform 26 (see Fig. 2) according to an embodiment of the invention can be placed in a blow moulding machine (not shown) and blow moulded according to bi-axial orientation blow moulding techniques with the neck 11 being held in a mould in such a way as not to expand. Initially, the expandable portion of the preform below the neck can be
10 mechanically stretched downwardly to the bottom of the mould and then the bulk of the preform can be blown outwardly by application of compressed air to the extent that a support portion 18 is formed around the stem end 16 such that an enclosed area 19 is formed between wall 20 of the container 10 and the stem 15 in the process of the formation by blow moulding of container 10.

15 In a particular form, the enclosed area 19 is of sufficient cross-sectional area to allow at least two fingers of a human hand to be inserted therethrough and to grasp handle 15 so as to support the container 10.

The blow moulding operation is carried out in such a way so as to provide a bottle or container having optimum strength by achieving biaxial orientation of the
20 molecules of the preferred PET material as well as improved barrier properties to reduce oxidation.

In accordance with an embodiment of the invention, the neck 11 and handle 15 can be crystallised by over-heating those parts of the preform. The crystallisation of the handle increases its rigidity which assists orientation of the preform and permits
25 the use of less material.

Crystallisation of the neck and handle can be carried out by running hot oil over the neck and handle, applying an open flame or by blowing hot air.

The location of the handle 15 on the ring 14 ensures that there is minimum interference to the blow moulding process applied to the remainder of the preform.
30 Either a one stage or two stage process can be used.

DETAILED DESCRIPTION OF FURTHER EMBODIMENTS

Fig. 1 illustrates the prior art preform or parison 21 of US 4,629,598. The concept of this prior art disclosure is to form a handle portion 23 from the locating ring of non-expandable portion 22 of the parison 21.

5 With reference to Fig. 2 and with reference to the detailed description of the preferred embodiment this arrangement of Fig. 1 is modified according to the present invention in a number of respects.

Insets 2A, 2B and 2C show bulbous portions 27 forming part of stem end 16 in the shape, respectively of a downwardly extending hook 24a, a bulb 24b and an
10 upwardly extending hook 24c.

These portions have in common a shape which is adapted to engage mechanically with a blown portion of the container 10 which is adapted to envelop the bulbous portion 27.

The process by which the second stage blow of the expandable portion 12 of
15 parison 26 is effected so as to envelope the bulbous portion 27 of stem end 16 is a stretch blow, biaxial orientation process.

With reference to Fig. 4 a particular method of manufacture of the preform or parison 26 is illustrated. It includes a two stage process for the formation of the parison by an injection moulding process. In Stage 1 a first injection mould inlet 28
20 permits entry of plastics material for the formation of the expanded portion 12 of the parison 26 (expanded in the blow moulding stage of container formation, with reference to Fig. 3).

In a second stage of the injection moulding process for the formation of parison 26 a second injection mould inlet 29 permits entry of plastics material for the
25 formation of the non-expandable portion 25 of parison 26.

The two stage injection arrangement is such that different plastics materials may be injected through first injection mould inlet 28 and second injection mould inlet 29.

In a particular form the plastics material injected in first injection mould inlet
30 28 is non-recycled or substantially non-recycled plastics material whilst the plastics material injected into second injection mould inlet 29 is recycled or at least partially

recycled plastics material.

This arrangement permits controlled use of proportions of recycled and non-recycled plastics material in order to achieve optimum economics in the construction of parison 26.

5 In a modification of this arrangement the Stage 2 step can include the production of two walls in the non-expandable portion 25 comprising inner wall 51 and outer wall 52. Inner wall 51 is made from virgin or non-contaminated PET material and acts as an insulation barrier with respect to wall 52 which can be made from recycled material 52. This dual wall arrangement can be produced by use of a
10 sliding core arrangement as a modification in the die arrangement and process described with reference to Figs. 6, 7 and 8 later in this specification.

Of course the Stage 1 and Stage 2 steps of Fig. 4 can be interchanged in order.

A parison and resulting container according to a further arrangement are illustrated in Figs. 5A and B respectively. Like parts are numbered as for previous
15 embodiments.

In this arrangement the parison 21 includes a locating ring 14 immediately below which is a first non-expanding region 30 and a second non-expanding region 31. The first non-expanding region 30 may itself be formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison 21. Second non-
20 expanding region 31 may not be differentiated from the expandable portion of parison 21 but, in use, the blowing operation will be such as to ensure that the second non-expanding region 31 is not expanded in the blowing process.

In this case the stem 15 includes a first rib 32 integrally moulded with and extending from locating ring 14. The stem 15 also includes second rib 33 integrally
25 moulded with and extending from second non-expanding region 31. Stem 15 further includes a rib connector 34 integrally moulded with and extending from first non-expanding region 30 and forming a continuous connection between first rib 32 and second rib 33 throughout the length of stem 15.

The parison 36 of Fig. 5A is then blown in the manner previously described to
30 form the volume 35 of container 37 illustrated in Fig. 5B. The neck portion including stem 15, ring 14, first non-expanding region 30 and second non-expanding region 31

remain unexpanded whilst the expandable portion 36 of parison 36 is biaxially stretched to form the major volume 35 of container 37. The stem end 16 may include the bulbous portions according to the previously described embodiments for connection to container 37 or, either alternatively or in addition can include the application of an adhesive material whereby a chemical bond is formed between stem end 16 and the wall of container 37 by the use of a chemical intermediary.

In a modification of the arrangement of Fig. 5A and Fig. 5B first non-expanding region 30 and second non-expanding region 31 can form part of a single non-expanding region.

10 In yet a further modification second non-expanding region 31 can be located in the temperature transition zone of the container and wherein minor expansion during the blow moulding step may take place.

In yet a further modification both first non-expanding region 30 and second non-expanding region 31 may be located in the temperature transition zone immediately below the locating ring 14 and, again, minor expansion of these regions may take place during blowing.

With respect to the last two variations described advantage is taken of the observation that expansion at the temperature transition zone can be limited by appropriate mould design and process control whereby unwanted distortion effects caused by the rigid interconnection of this temperature transition zone 30, 31 via second rib 33 and rib connector 34 to ring 14 (or other non-expanding portion of the neck 11) can be controlled.

In use preforms and containers blown therefrom can be manufactured as follows:

25 A preform is formed from orientable plastics material, preferably PET or like material in an injection moulding process. Slidable dies are illustrated in Figs. 6, 7 and 8 and include a sliding core 40, sliding blocks 41, body 42, base 43, push block 44 and splits holder 45. Fig. 6 illustrates the die in open position, Fig. 7 illustrates the die in closed position and Fig. 8 illustrates a side view showing accommodation of the stem 14.

The completed preforms in a second and preferably separate step are

subsequently passed to a stretch blow mould machine where the preforms are first reheated to the appropriate transition temperature (refer introduction). The non-expandable portion of the preform including locating ring 14 and stem 15 are shielded substantially from the reheat process by appropriate guarding. In most instances there is likely to be a temperature transition zone in the region 30, 31 described with reference to Figs. 5A, 5B.

The reheated preform is then placed in a mould and biaxially stretched and the expandable portion blown to full size utilising processes known in the art. During this process the preform is supported at neck 14 and may also be supported at stem 15. Stem 15 does not take part in the blow process although its stem end 16 may be partially enveloped by an external wall of the blown container.

DETAILED DESCRIPTION OF METHODS OF MANUFACTURE INCORPORATING MODIFIED TWO STAGE STRETCH BLOW MOULDING MACHINES

Fig. 9 illustrates a modified two stage stretch blow mould machine 110 adapted to stretch blow mould (including biaxial orientation) of the preforms of previous embodiments and preforms of further embodiments to be described below with reference to later figures.

The machine 110 comprises a first carousel 111 adapted to receive integral handle preforms 112 from inclined chute 113 into apertures 114 spaced around the periphery thereof.

As first carousel 111 rotates it moves, via apertures 114 the preforms 112 from the chute 113 to a second carousel loading position where the preform 112 is transferred to a spindle 115 mounted near the periphery of second carousel 116.

A sector of approximately 270° of second carousel 116 is arranged as a preheating tunnel 117 where the preforms 112 are progressively heated by a heating bank mounted in opposed relationship to the path of travel of the preforms.

The suitably preheated preforms 112 are loaded consecutively into apertures 119 of a third carousel 120 which acts as a transfer mechanism to both suitably orient the preforms 112 about their longitudinal axis and present them to a mould cavity 121 comprising first half mould 122 and second half mould 123.

It should be noted that during their time in the preheating tunnel 117 the preforms 112 are rotated about their longitudinal axis by spindles 115 and have a handle shroud 124 mounted over the preform stem which subsequently forms a handle for blown container 125. Details of the rotation of spindles 115 and the shrouding of the preform stem are discussed more fully with reference to Figs. 10, 11 and 12.

Mould cavities 121 are mounted on the periphery of a fourth carousel 126. During their travel through approximately a 270° sector the half moulds 122, 123 rotate to a closed position about their axis 127 and, whilst closed, the preform 112 enclosed therein is blown and biaxially stretched in known manner in order to produce an integral handle, blown container 125. This container 125 is ejected as illustrated when the half moulds open preparatory to receiving a fresh, preheated preform 112.

With reference to Fig. 10 further detail is shown of spindles 115 and handle shrouds 124 and their manner of operation upon and in relation to preforms 112 whilst passing through preheating tunnel 117 on second carousel 116.

The spindles 15 are rotated by band drive 128 so as to, in one embodiment, rotate the preforms 112 through approximately four full axial rotations during their passage through the preheating tunnel 117.

Whilst in the preheating tunnel 117 a handle shroud 124 is lowered over the free end 129 of handle stem 130 so as to fully shroud the handle stem 130 as best seen in greater detail in Fig. 12.

The shroud 124, in one preferred form, is cylindrical save for a fluted open mouth 131 best seen in Fig. 12. The fluted mouth 131 assists in ensuring maximal shrouding of handle stem 130 and also assists in guiding the shroud 124 onto the free end 129 of stem 130.

Lifting and lowering of the shroud 124 is effected through a shroud support stem 132 which is suspended from a cam follower 133 adapted to travel on cam 134.

The stems 132 are themselves rotated by band drive 135 so as to follow the rotation of spindles 115. As best seen in end view of Fig. 11 the shroud support stem 132 is offset from the cam follower stem 136 by virtue of being mounted near the periphery of platten 137.

As cam follower 133 rides up cam 134 it pulls handle shroud 124 up with it by

virtue of the connecting link comprising shroud support stem 132, platten 137 and cam follower stem 136.

Cam follower stem 136 can comprise a telescoped arrangement allowing relative axial rotation between two component, telescoping parts thereof.

- 5 The handle shroud 124 can comprise alternative shapes other than cylindrical, for example an oval cross section is possible although the cylindrical arrangement having a circular cross section is preferred.

The handle shroud 124 is preferably made of insulating material such as a ceramic material and is covered on an exterior surface 138, in a preferred version,
10 with a heat reflecting material which, ideally, is also light reflecting.

In use the reflective surface 138 causes light and heat emanating from heating bank 118 to be reflected thereof whereby two functions are performed. The first function involves protecting the handle stem 130 from heat. The second function is to reflect heat and light in the direction of that portion of the preform closest to the
15 handle stem 130 so that it is evenly heated and tends not to be shadowed by the stem 130.

In one particular form the handle shrouds 124 can be cooled by an air or nitrogen blast (not shown) directed at them whilst they are lifted clear of the preform 112. This will assist to prevent radiated and/or convected heat building up within the
20 cavity 139 of the shroud 124.

Figs 13-23 illustrate details of a preform, mould and container blown therefrom and therein by the machine of Fig. 9. With reference to Fig. 13, in a preferred version, dimension A is greater than dimension B thereby to discourage tangling of preforms prior to loading into chute 113.

- 25 It will be observed that the top end of the handle is located close to the locating ring in this version. It will also be noted that the stem of the preform which subsequently constitutes the handle of the blown container is fully supported within the half mould during the entire blowing process. In contrast the walls of the container including portions of the container wall peripherally opposite the top end of
30 the handle stem are free to be blown within the constraints of the mould.

With reference to Figs. 24-34 a second version of a preform, mould and

resulting blown container is illustrated wherein first non-expanding region 30 is relatively long in the axial direction including a portion 140 which extends from locating ring 141 down to and around at least a top portion of the connection of the handle stem 130 thereby forming a join of the top end of handle stem 130 to locating ring 141. (Best seen in Fig. 24).

In this version there is at least partial expansion of wall portions of the preform located peripherally away from the join of the handle stem 130 to the preform 112 (best seen in Figs 32 and 34). This expansion, relatively, is not as great as the biaxial expansion occurring below the first and second non-expanding regions 30, 31. It can, however, be significant in providing strength and resistance to gas permeation in at least second non-expanding region 31, if not non-expanding region 30.

CONTAINER RESISTANT TO INTERNAL PRESSURES

With reference to Figs. 35 to 39 there is shown a container 150 incorporating an integral handle 151 which is biaxially blown from the preform 152 illustrated in Figs. 40 and 41.

In this instance, as perhaps best seen in Fig. 36, the blown container 150 includes a discontinuity region 153. In this instance the discontinuity region 153 extends the entire circumference of the container 150.

As best seen in Fig. 38 the discontinuity region 153 lies in a plane which subtends an acute angle alpha with a horizontal plane XX.

The plane of the discontinuity region 153 is oriented so that where it passes closest to the integral handle 151 it lies between first end 154 and second end 155 of the handle 151.

In this instance that part of the discontinuity region 153 located furthest from the handle 151 lies in the plane XX which passes through, or close to, join region 156 where the second end 155 of handle 151 is joined to container 150.

The discontinuity region 153 is formed by a substantial change in direction of the wall of the container 150, perhaps best seen in Fig. 35 wherein first tangent 157 to upper wall portion 158 intersects with second tangent 159 to lower wall portion 160 of container 150 at an obtuse angle beta, thereby forming a portion of the discontinuity

region 153.

This discontinuity region 153 imparts additional strength to the container walls, thereby to resist deformation of, particularly from internal pressures which can arise when the container is sealed, as for example when the container contains a carbonated
5 beverage.

In order to assist in the creation of the discontinuity region 153 the preform 152 from which the container 150 is biaxially blown includes different wall thickness profiles, in this instance in the form of first wall profile 161, second wall profile 162 and third wall profile 163 separated one from the other by first transition zone 164 and
10 second transition zone 165 as best seen in Fig. 40.

It will be observed that the wall thickness of third wall profile 163 is greater than the wall thickness of second wall profile 162 which, in turn, is greater than the wall thickness of first wall profile 161.

The second end 155 of the handle 151 is joined to the container during a
15 biaxial blowing operation by deflation and envelopment about the second end 155. The second end 155 can include a bulbous portion including a bulbous portion of the types illustrated in Fig. 2.

The preform 152 can be manufactured from PET materials in an injection moulding operation as described earlier in this specification.

20 The preform 152 is then blown as a second stage operation in a stretch blow moulding machine so that its walls conform to the inside surfaces of a mould, also as described earlier in this specification.

TAG CONNECTED HANDLE

With reference to Fig. 42 and Fig. 43 an alternative version of the container and the preform from which it is constructed are illustrated and comprises a rudimentary form of the multiple integral connection handle arrangement of the invention.

With reference to Fig. 42 the container 201 includes an integral handle 202 as previously described and constructed, save that the connection to the lower end of the container 201 is formed as an integral connection by way of a tag 203 which extends from a lower edge 204 of a wide part of the handle 202 down to a mid circumferential portion 205 of container 201 at which point it is integrally connected thereto. The lower edge 204 of the wide part of the handle 202 includes a landing portion 206 which merely rests on the surface of the container 201 at this point rather than being integrally connected thereto or otherwise connected thereto at this point.

A preform 207 from which the container 201 of Fig. 42 is blown is illustrated in Fig. 43. This preform 207 is constructed substantially in the same manner as that illustrated in Fig. 40 except that lower edge 204 of handle 202 is integrally connected to the preform 207 by way of tag 203 in the manner illustrated in Fig. 43.

The preform 207 is blown to form the container of Fig. 42 utilising the process previously described with reference to Figs. 10, 11 and 12.

PREFORM AND CONTAINER WITH MULTIPLE INTEGRAL CONNECTION HANDLE

With reference to Fig. 44 there is shown a preform 301 having a neck portion 302 and an expandable portion 303 located therebelow.

In substitution for the stem of the earlier examples in this specification is a loop 304 made from the same material as the wall 305 of the preform 301. In this instance the loop 403 is integrally connected at a first end 306 to a first location 307 on and forming part of the wall 305.

The other of the loop 304 being second end 308 is integrally connected into wall 305 at second location 309.

The loop 403 is formed in the same mould as and at the same time as the

preform 301 is moulded, in a preferred form from PET plastics material.

In this instance and with reference to Fig. 47 the loading of plastics material in the region of the wall 305 subtended between first location 307 and second location 309 can be differentially controlled as a function of location on the circumference of the wall 305 in this region designated the differential loading region 310 in Fig. 47.

In this particular instance there is an increased loading of material in the region of 310 immediately between the first location 307 and second location 309 whilst, the opposite region 311 located diametrically opposite region 310 has material removed from it as indicated in dotted outline.

Differential material loading as a function of circumferential position on wall 305 aids in providing control over the wall thickness of the blown container 312 illustrated in Fig. 45.

The container 312 can be blown in a two stage process utilizing the apparatus previously described in this specification and utilizing the shielding principals also described.

In this example the region 310 subtended between first location 307 and second location 309 remains substantially unchanged during the blowing process and can be considered an extension of and part of the next portion 302 of the preform 301.

Fig. 346 illustrates an alternative form of construction of a loop 313 which, in this instance, again comprises an elongate, stem-like structure including reinforcing ribs 314 but having, in this instance, a deflectable portion 315 which is connected on one side by a first bridge portion 316 to the balance of the loop 313 and, at its other end by a second bridge portion 317 integrally to container wall 318.

In this instance the second bridge portion 317 is akin in structure to the tag 203 previously described and provides a necessary element of flexibility. A first bridge portion 316 can be of the same kind of structure and, again, being integrally formed at the time that the preform is blown.

In use, during a second stage blowing of the container 319 it will be observed that the container wall 318 to which second bridge portion 317 is integrally connected moves during blowing and this movement is accommodated by deflection of deflectable portion 315, loop 313 about first bridge portion 316 and second bridge

portion 317.

In production, utilizing the apparatus previously described, it is possible to move material differentially within a wall portion such as, for example, in the differential loading region 310 it is possible to cause the material closest to the inside
5 of the container to move whilst leaving the material closest to the outside of the container essentially static relative to first location 307 and second location 309, thereby leaving the outside wall region stable during the second stage blowing step.

In production in a two stage machine it is important to have a heating tunnel of sufficient width to allow for rotation of the preforms with stem/loop protecting
10 thereon. It is also important to have the ability to shield in a controllable manner the stem/loop portions of the preform during its pass through the heating tunnel and also the ability to selectively shield that region of the preform wall subtended between and beneath the stem/loop thereby to provide an important element of control over the heat profile throughout the preform immediately prior to its insertion into the mould cavity
15 for the second stage blow moulding step.

In a particular form the heat shield can be attached to a mandrel and can pass into the mould cavity for retention therein during the second stage blowing step.

Whilst a single handle has been shown on embodiments described thus far it will be appreciated that more than one handle can be provided on a given container
20 following the principals described in this specification.

A preform 410 according to a further embodiment of the invention is illustrated in side section view and, in this instance, includes a symmetrical thickening of the wall 411 of the preform 410 in the lower region 412 which extends from immediately below the point of connection 413 of the lower end 414 of handle 415. In a second,
25 intermediate region 416 located between point of connection 413 and point of connection 417 of handle 415 the wall thickening of the preform 410 tapers gradually from first thickness T1 to second (thinner) thickness T2.

This thickening is symmetrical about the longitudinal axis TT of preform 410 and results in a controllable increase in the thickness of material in blown container
30 418 (refer Fig. 50) in the corresponding intermediate region 416, but also in a sub-region 419 immediately below point of connection 413 of the lower end of handle

414. It is postulated that the increased thickening of the blown container in the region
419 results from a flowing of the material from intermediate region 416 through to
sub-region 419 during the second stage process of blow moulding, thereby to provide
control over the wall thickness of material in the region 419 of the blown container
5 418.

Figs. 51 and 52 provide alternative views of the blown container 418. Fig. 51
illustrates more clearly the anti-symmetric bulbous portion 420 which is offset about
the longitudinal axis TT with respect to handle 415.

Fig. 52 illustrates a star formation indentation 421 in base portion 422 of
10 container 418. It comprises a central, circular indentation 423 from which subtend
wedge shaped indentations 424 in a circular array as illustrated in both Fig. 50 and
Fig. 52.

In this instance container 418 also includes longitudinal indentations 425 in the
walls of region 412 as illustrated in Fig. 50, thereby to increase the strength of the
15 blown wall portions in this region.

The above describes only some embodiments of the present invention and
modifications obvious to those skilled in the art can be made thereto without departing
from the scope and spirit of the present invention.

20 **INDUSTRIAL APPLICABILITY**

Embodiments of the invention are applicable to the manufacture of containers
made from orientable plastics material and incorporating a handle or like grasping
fixture as an integral component of the container.

CLAIMS

1. A preform for a container comprised of orientable plastics material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a moulded structure having a neck portion and an expandable portion below the neck, at least one loop of orientable plastics material integrally connected at both a first end and a second end to a respective first location and a separate second location on said preform which when the container is formed constitutes said handle.
2. A method of forming a container having an integral handle; said method comprising:
 - (a) forming a preform having a neck portion and an expandable portion below the neck portion, said preform having at least one loop of orientable plastics material integrally connected at both a first end and a second end to a respective first location and a separate second location on said preform, and
 - (b) performing a blow moulding operation on said preform to expand the expandable portion to form the body of the container.
3. The method of claim 2 wherein the neck portion includes a locating ring above the expandable portion.
4. The method of claim 2 wherein said container is formed from said preform in a two stage operation.
5. The method of claim 4 wherein the handle allows at least two fingers of the adult human hand to pass therethrough.
6. The method of claim 2 wherein the loop is formed so as to have an I-shaped cross-section at least throughout that portion of the stem where it projects from the external side of said tube.
7. A parison or preform as claimed in claim 1 for an injection stretch blow moulding process, said parison formed by an injection process including two separate points of injection.
8. The parison of claim 7 wherein a first point of injection permits injection of non-recycled PET or like plastics material.

9. The parison of claim 7 or 8 wherein a second point of injection permits injection of PET or like plastics material incorporating at least a portion of recycled material.
10. The parison of claim 7 or 8 wherein said first point of injection is for the formation of that part of the parison which will be stretched during a stretch blow moulding operation on the parison.
11. The parison of claim 9 wherein said second point of injection is for the formation of those parts of said parison which will remain unexpanded or substantially unexpanded in a stretch blow moulding operation on said parison.
12. A container manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle integrally affixed at at least a first point and a second point to said container so as to form an enclosed area between the handle and the container and through which the fingers of a human hand may be passed.
13. The container of claim 12 wherein said first point of connection comprises an integral connection between the handle and the neck portion of the container and is formed in a first stage of said two stage process.
14. The container of claim 13 wherein said second point of connection is located on an expandable portion of said container.
15. The container of claim 13 wherein said second point of interconnection is located on a lower neck portion of said container at a substantially non-expanding part.
16. The container of claim 15 wherein said first and second points of connection are located on a substantially non-expanding part of said container.
17. The container of any one of claims 12 to 16 including an elongated substantially non-expanding neck portion to which said loop is affixed.
18. The preform of Claim 1 further including a locating ring immediately below which is a first non-expanding region and below which is a second non-expanding region.
19. The preform of Claim 1 or 18 wherein the first non-expanding region is formed so as to be slightly raised or otherwise differentiated from the expandable

- portion of said preform.
20. The preform of Claim 18 or 19 wherein the second non-expanding region is not differentiated from the expandable portion of said preform.
 21. The preform of any one of Claims 18-20 wherein the loop includes a first rib integrally moulded therewith.
 22. The preform of Claim 21 wherein said loop includes a second rib integrally moulded with and extending from said second non-expanding region.
 23. The preform of Claim 22 which further includes a rib connector integrally moulded with and extending from first non-expanding region and forming a continuous connection between said first rib and said second rib throughout the length of said loop.
 24. The preform of any one of Claims 18-23 and wherein said second non-expanding region forms part of a temperature transition zone.
 25. The preform of any one of Claims 18-24 and wherein said first non-expanding region forms part of said temperature transition zone.
 26. The preform of Claim 24 or Claim 25 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
 27. The preform of any one of Claims 18-26 manufactured by a two stage injection moulding process wherein material is injected at different locations in the die to form a preform adapted to be composed from more than one type of material.
 28. The preform of Claim 27 wherein during at least one stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall adapted to be made from a different material from said outer wall.
 29. A container stretch blow moulded from the preform of any one of claims 18-28.
 30. A container made from PET material and stretch blow moulded from the preform of any one of Claims 18-29.
 31. A method of production as a two step process of an integral handle PET container from a preform which has a loop of orientable plastics material at least one loop of orientable plastics material integrally connected at both a first

- end and a second end to a respective first location and a separate second location on said preform ; said method including the step of shrouding said loop of said preform during preheating of said preform preparatory to a stretch blow moulding step.
32. The method of Claim 31 wherein the loop is fully supported in a mould cavity against movement during the stretch blow moulding operation.
 33. A container comprised of biaxially orientable plastics material manufactured from a two stage injection stretch blow moulding process; said two stage process comprising a first stage in which a preform is manufactured and a second stage in which said preform is reheated and biaxially stretched to form said container; said container including a graspable handle integrally affixed at at least a first point of connection and a second point of connection to said container so as to form an enclosed area between said handle and said container and through which at least two fingers of a human hand can pass.
 34. The container of claim 33 wherein said first point of connection and said second point of connection comprises an integral connection between the handle and the container and is formed in said first stage of said two stage process.
 35. The container of claim 34 further including a locating ring at a neck portion thereof.
 36. The container of claim 33, 34 or 35 further including a first non-expanding region immediately below said locating ring.
 37. The container of claim 36 further including a second non-expanding region below said first non-expanding region.
 38. The container of claim 36 wherein said first non-expanding region is formed so as to be slightly raised or otherwise differentiated from that portion of said container which is fully biaxially oriented during said second stage of said two stage process.
 39. The container of claim 37 wherein said second non-expanding region is not differentiated from that portion of said container which is fully biaxially oriented during said second stage of said two stage process.

40. The container of claim 37 or claim 38 wherein minor expansion of said second non-expanding region takes place during said second stage of said two stage process.
41. The container of claim 37 wherein said handle includes a first rib integrally moulded with and extending from said locating ring.
42. The container of claim 41 wherein said handle includes a second rib integrally moulded with and extending from said second non-expanding region.
43. The container of claim 42 which further includes a rib connector integrally moulded with and extending from said first non-expanding region and forming a continuous connection between said first rib and said second rib throughout the length of said handle.
44. The container of claim 44 wherein said second non-expanding region forms part of a temperature transition zone.
45. The container of claim 36 wherein said first non-expanding region forms part of a temperature transition zone.
46. The container of claim 45 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
47. The container of claim 33 manufactured by said two stage injection moulding process and wherein material is injected at different locations during formation of said preform during said first stage of said two stage process whereby said container can be composed from more than one type of material.
48. The container of claim 47 wherein during said first stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall made from a different material from said outer wall.
49. The container of any one of claims 33-48 further including a discontinuity region as defined in the specification.
50. The container of Claim 49 wherein said discontinuity region lies in a plane which lies at an acute angle to the horizontal, said discontinuity region extending substantially throughout the circumference of said container.
51. The container of any one of Claim 49 or Claim 50 wherein said discontinuity region at its point closest to said handle is located between a first end and a

second end of said handle.

52. A preform from which the container of any one of Claims 33 to 51 is shown in a two stage process, said preform including more than one wall profile.
53. The preform of Claim 52 wherein said preform has a first wall profile closest to its neck followed by a second wall profile immediately there below and separated therefrom by a first transition zone.
54. The preform of Claim 53 wherein said preform further includes a third wall profile immediately below said second wall profile and separated therefrom by a second transition zone.
55. An injection machine for the manufacture of a parison or preform according to Claim 1 or any one of Claims 7 to 11 or any one of Claims 19 to 28 in a first stage of a two stage process.
56. A stretch blow moulding machine for the manufacture of a container having an integral handle, said machine operable according to the method of any one of Claims 2 to 6 or any one of Claims 31 or 32.
57. An injection machine for the manufacture of preforms having integral handles incorporated therein; said machine including moulds having a channel which permits PET material to flow into a stem portion which constitutes a handle in a container blown from a preform produced by said injection moulding machine.
58. The injection machine of Claim 57 wherein said channel of said mould includes a return portion whereby said stem is connected integrally at two points on said preform.
59. An injection blow moulding machine incorporating heat insulating means to insulate handle portions of preforms during heating of said preforms prior to stretch blow moulding thereof.
60. The machine of Claim 59 wherein said insulating means comprises a shroud.

ABSTRACT

A preform (207,301), and a container (201,312,319) blown therefrom in a two stage process (as defined in the specification) is disclosed having a loop (202,304,313) defining a handle portion of the resulting blown container and wherein the loop is integrally connected by both a first end (306) and a second end (308) to respective first location (307) and second location (309) of the preform during manufacture of the preform.

201,312,319
202,304,313
207,301
306
307
308
309

1/39

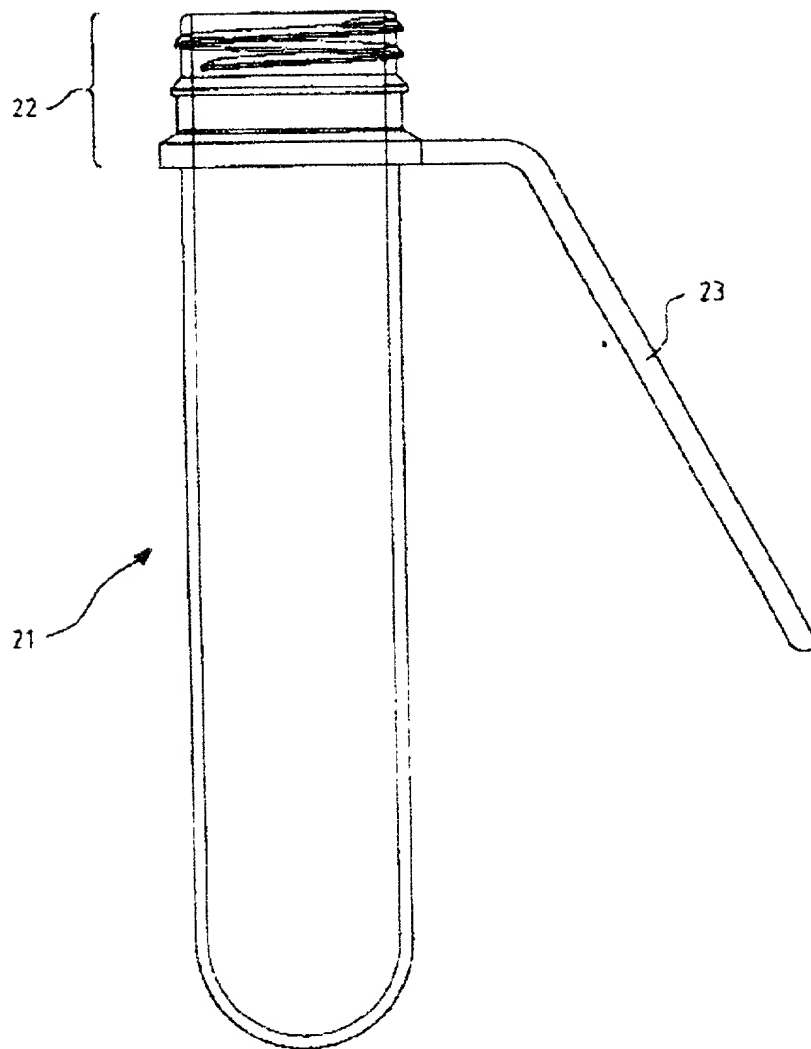


Fig. 1
Prior Art

09/581956

PCT/AU98/01039

WO 99/30883

2/39

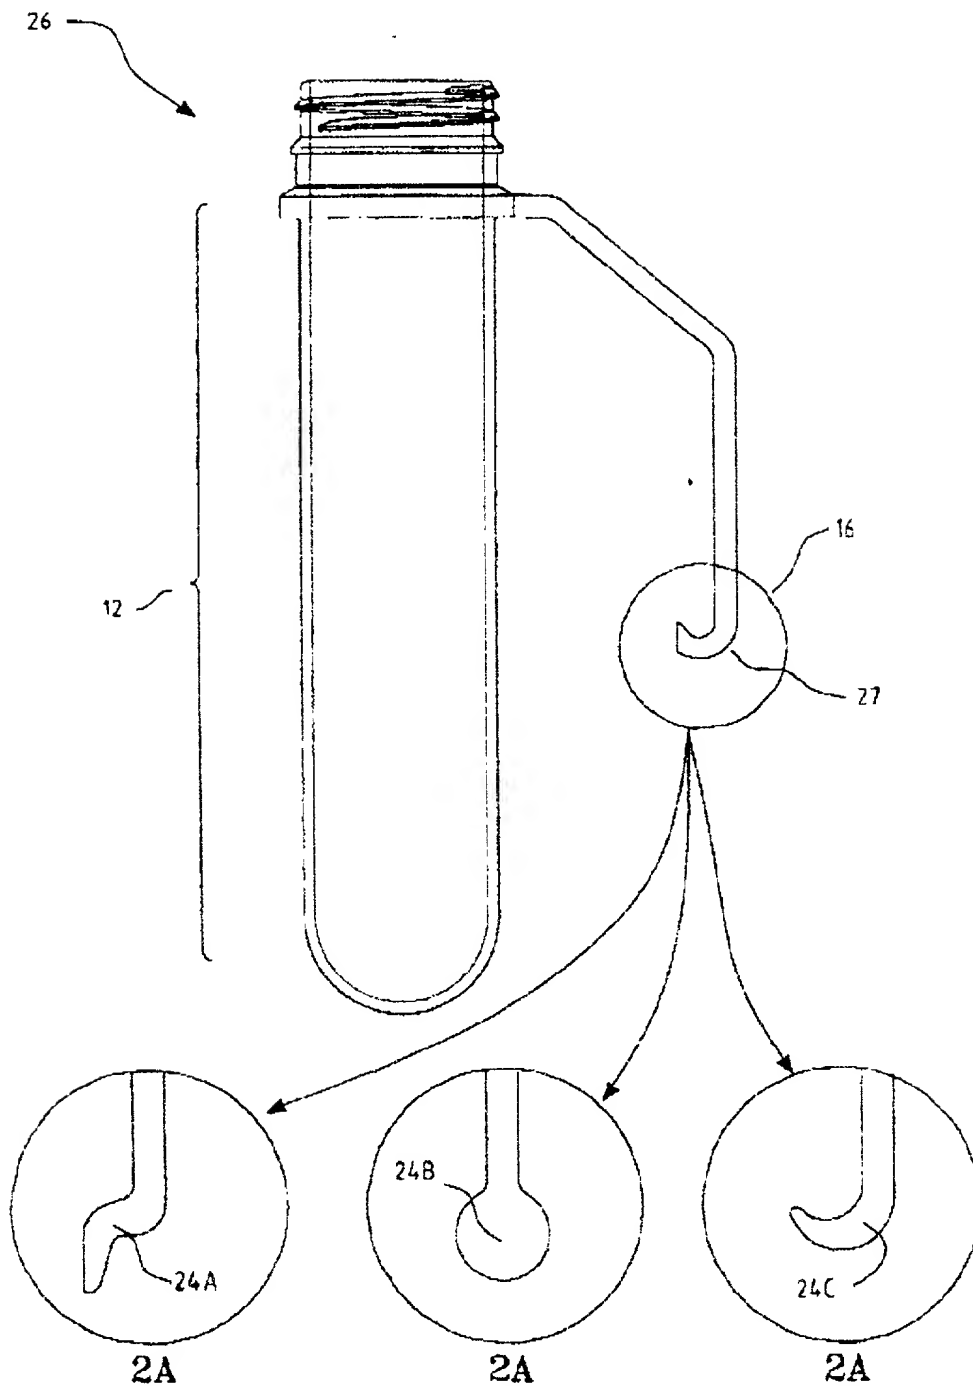


Fig. 2

WO 99/30883

09/581956
PCT/AU98/01039

3/39

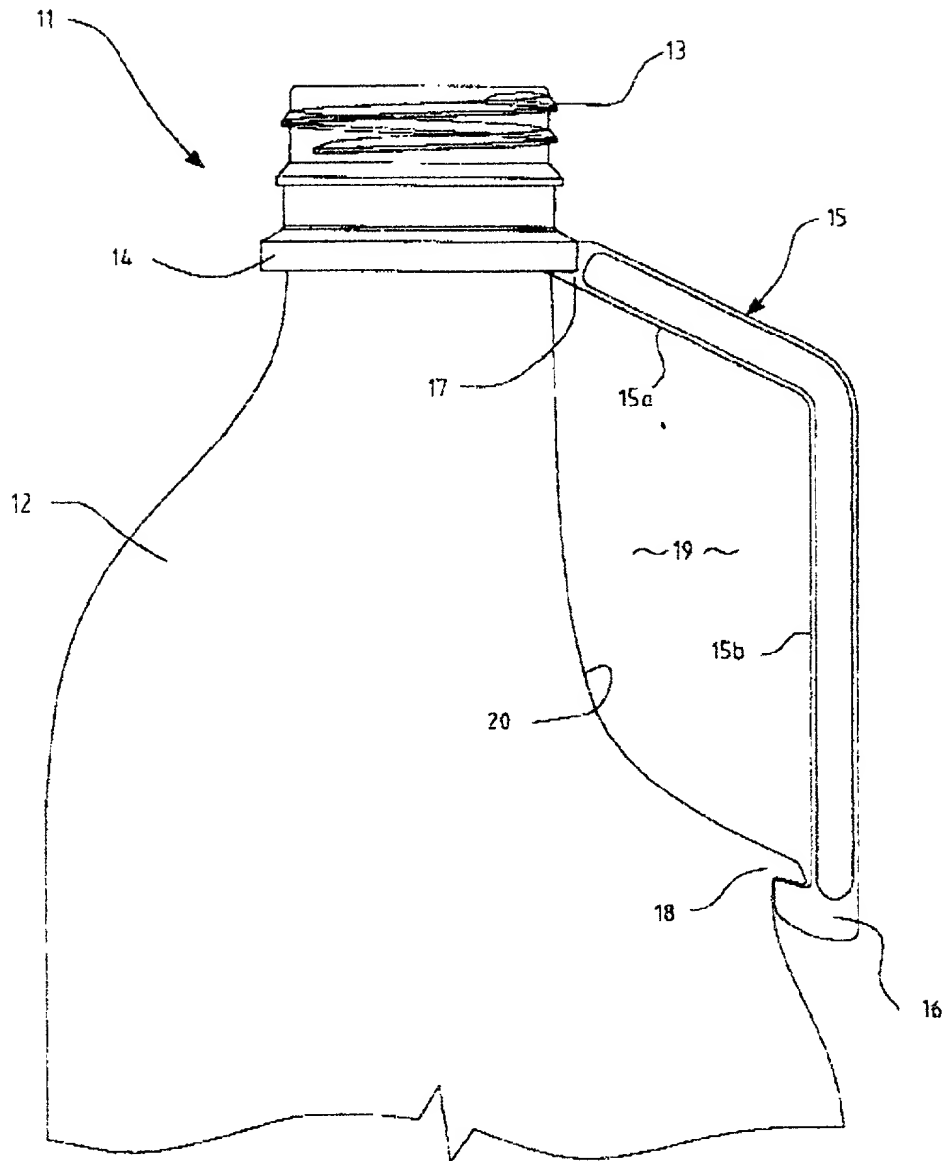


Fig. 3

WO 99/30883

09/581956
PCT/AU98/01039

4/39

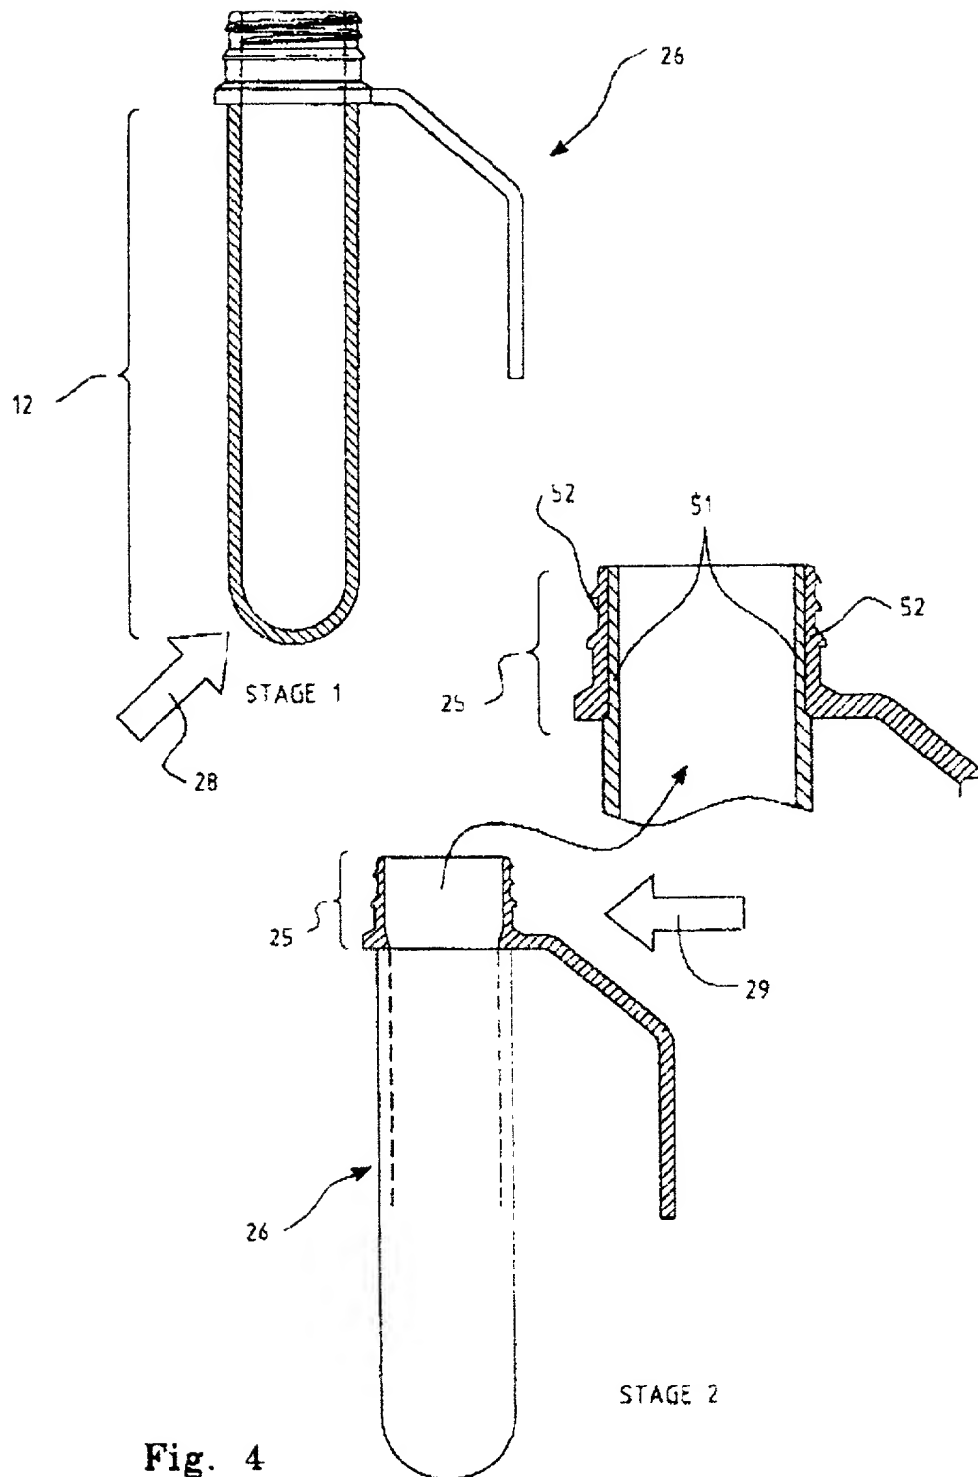


Fig. 4

WO 99/30883

09/581956
PCT/AU98/01039

5/39

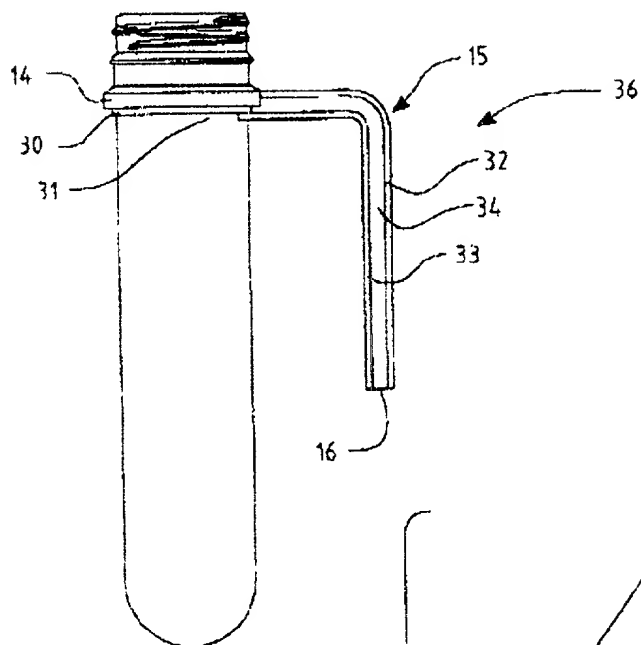


Fig. 5A

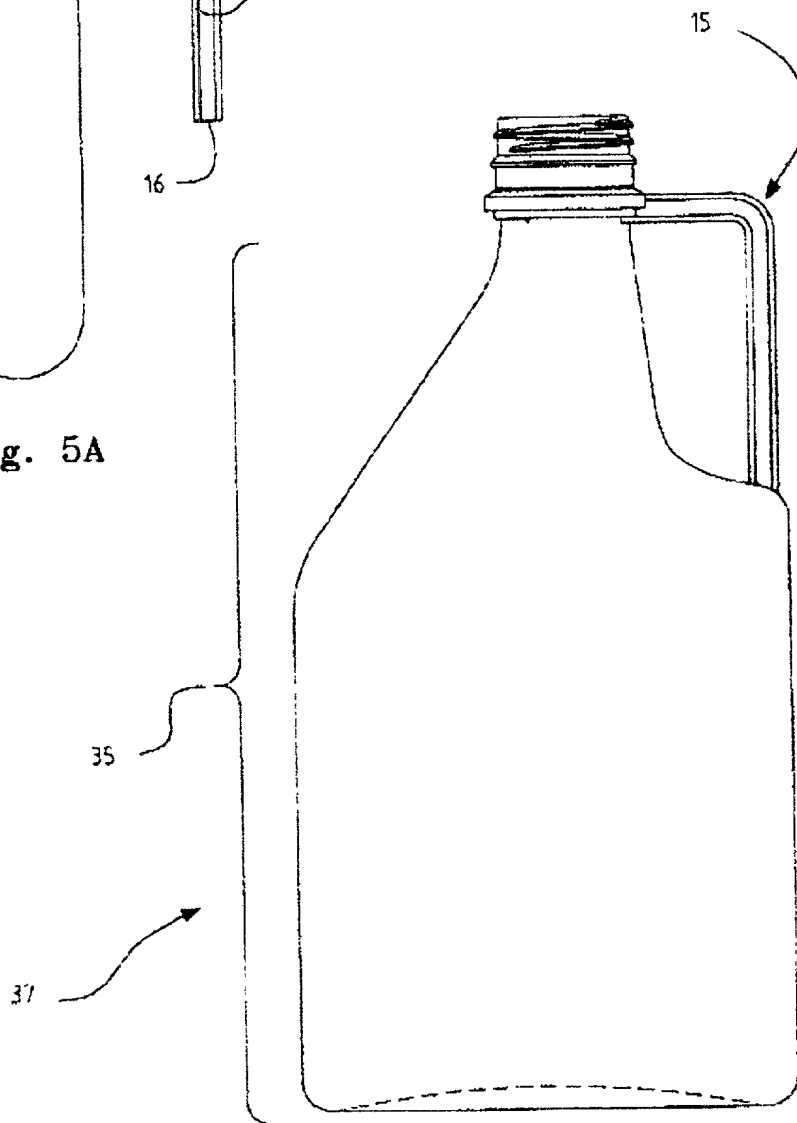


Fig. 5B

6/39

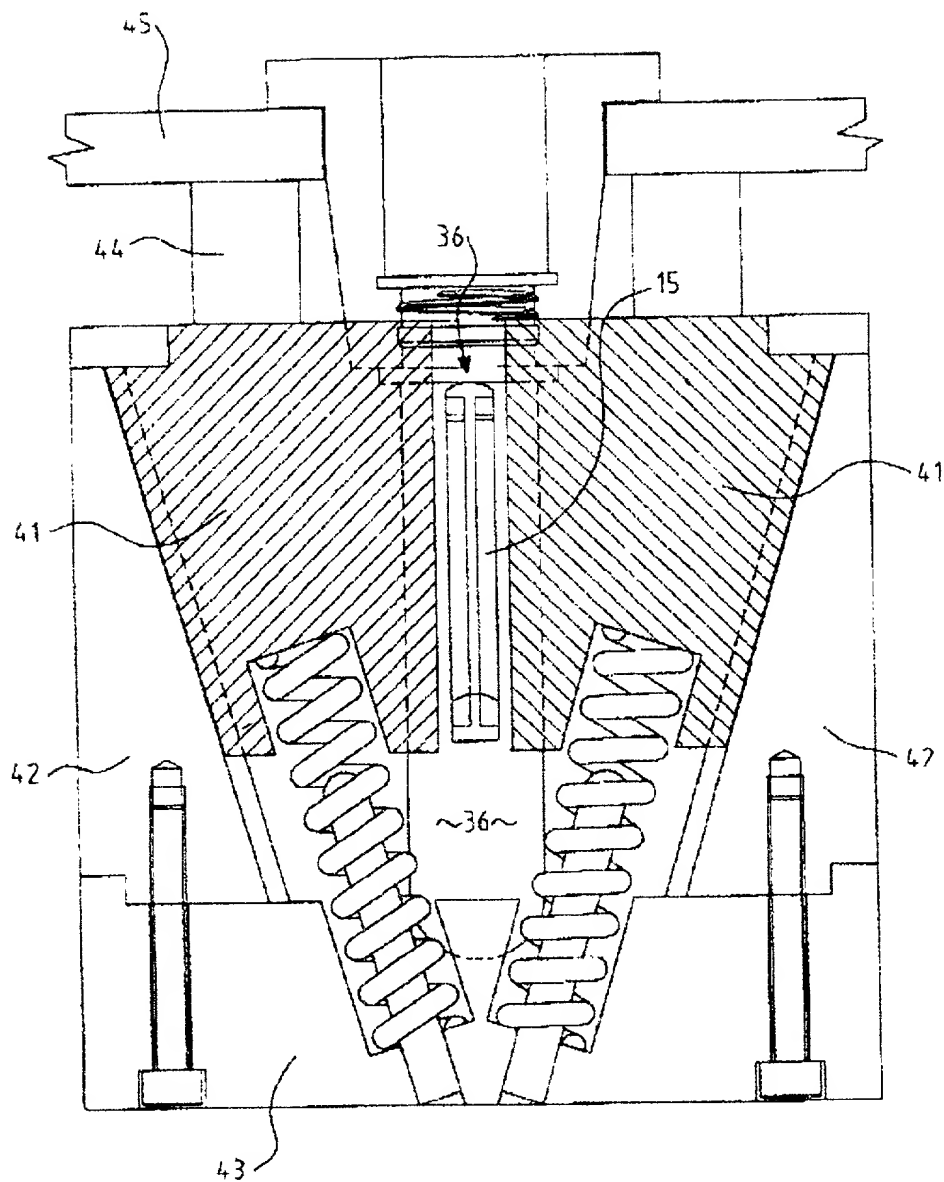


Fig. 6

7/39

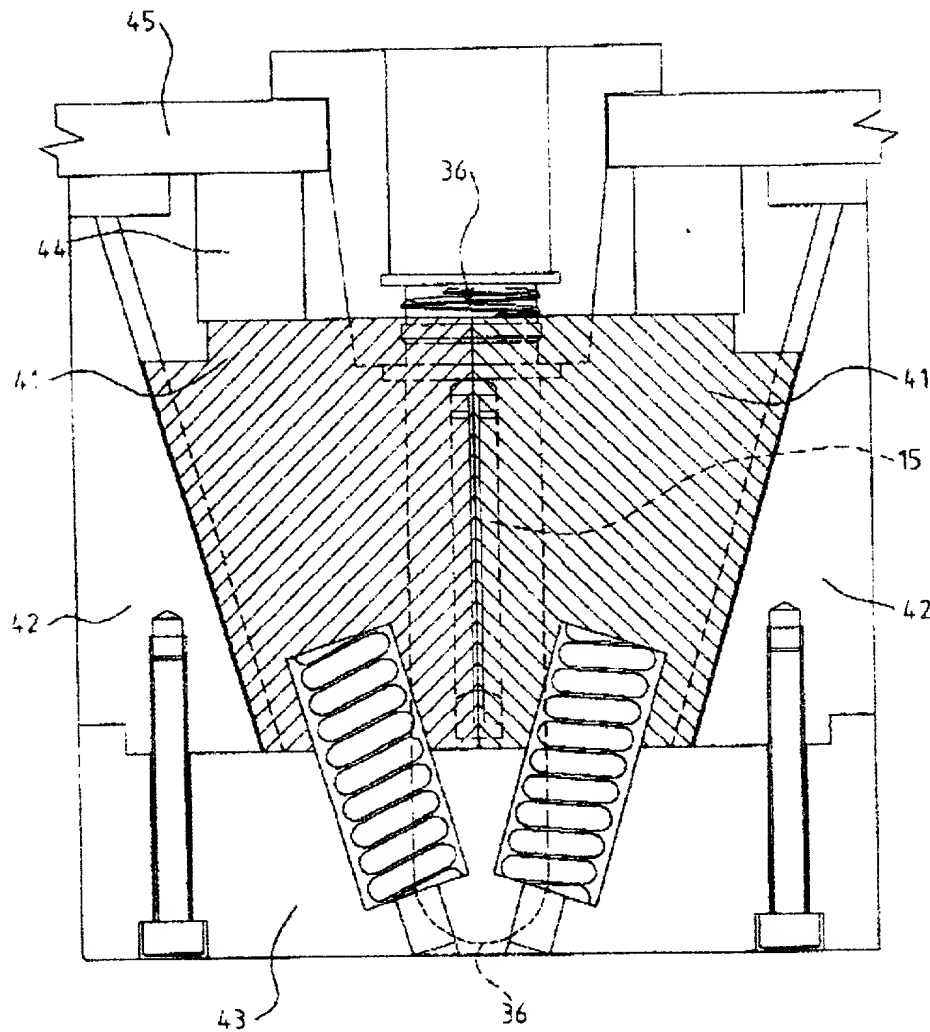


Fig. 7

SUBSTITUTE SHEET (Rule 26) (RO/AU)

WO 99/30883

09/581956
PCT/AU98/01039

8/39

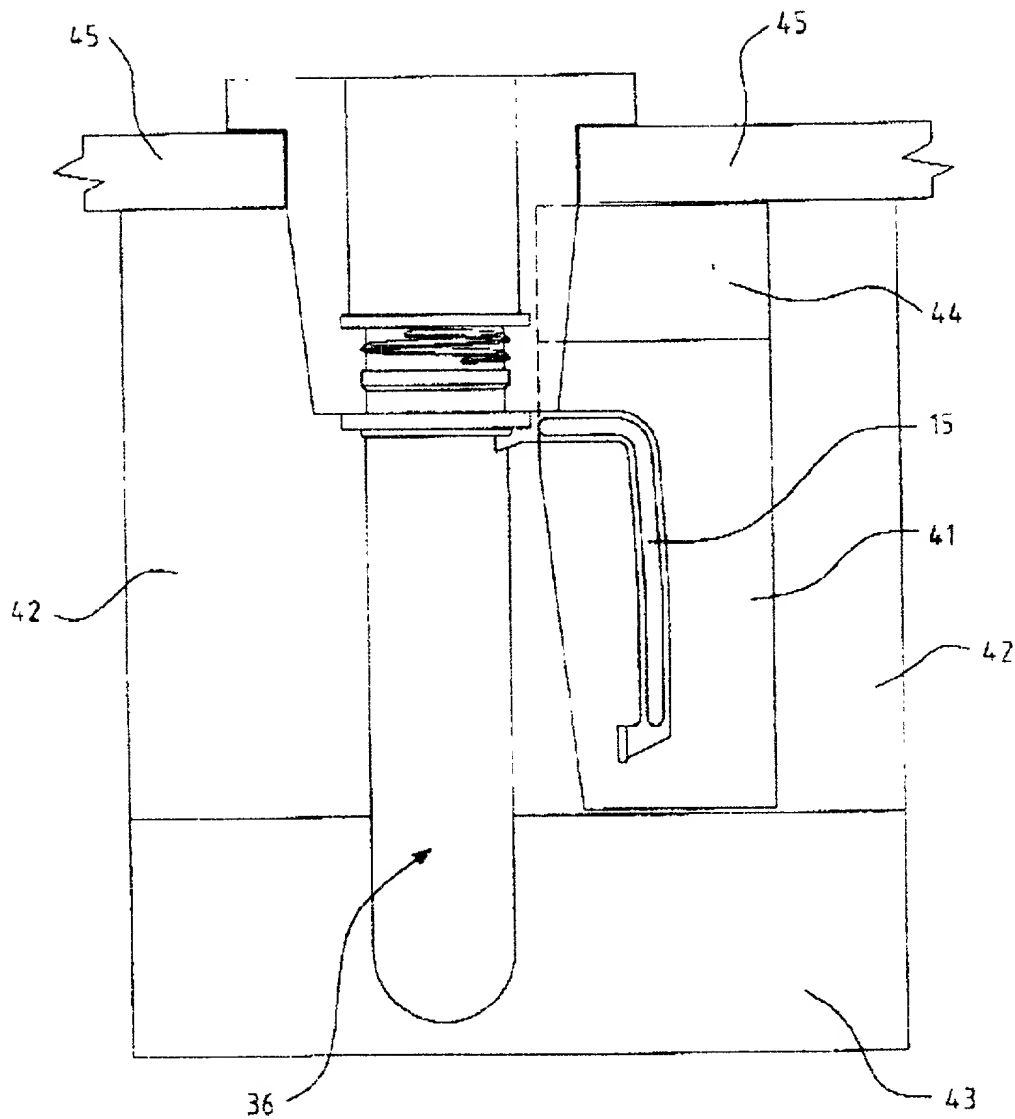


Fig. 8

SUBSTITUTE SHEET (Rule 26) (RO/AU)

WO 99/30883

09/581956
PCT/AU98/01039

9/39

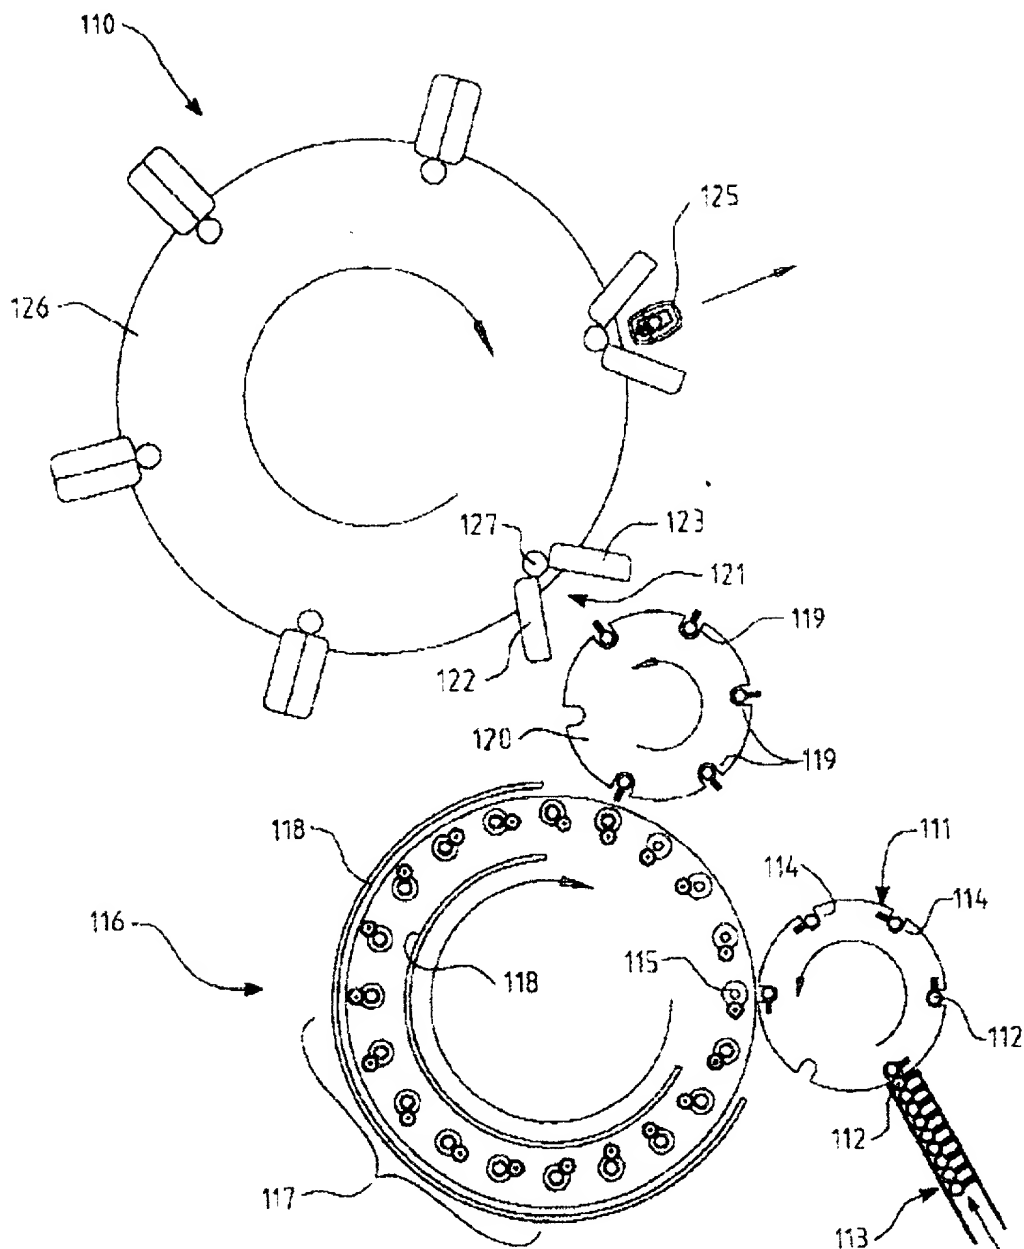


Fig. 9

SUBSTITUTE SHEET (Rule 26) (RO/AU)

10/39

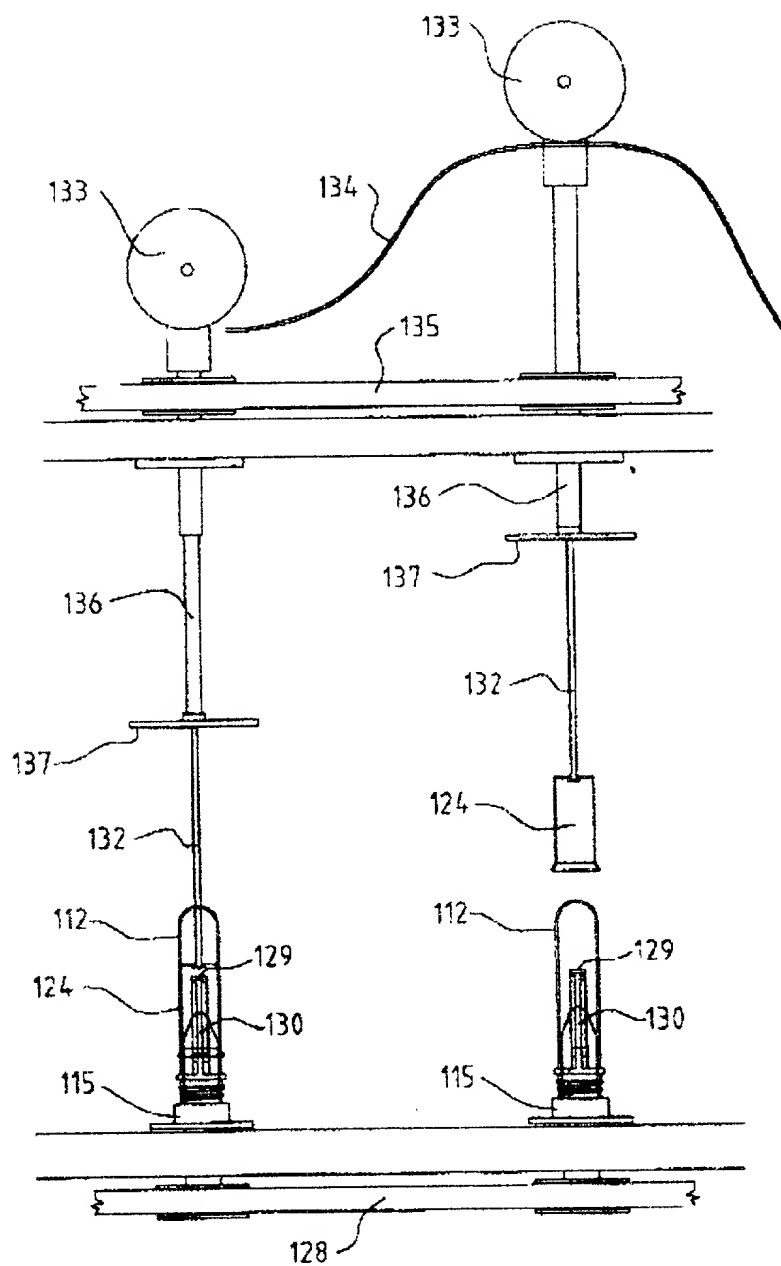


Fig. 10

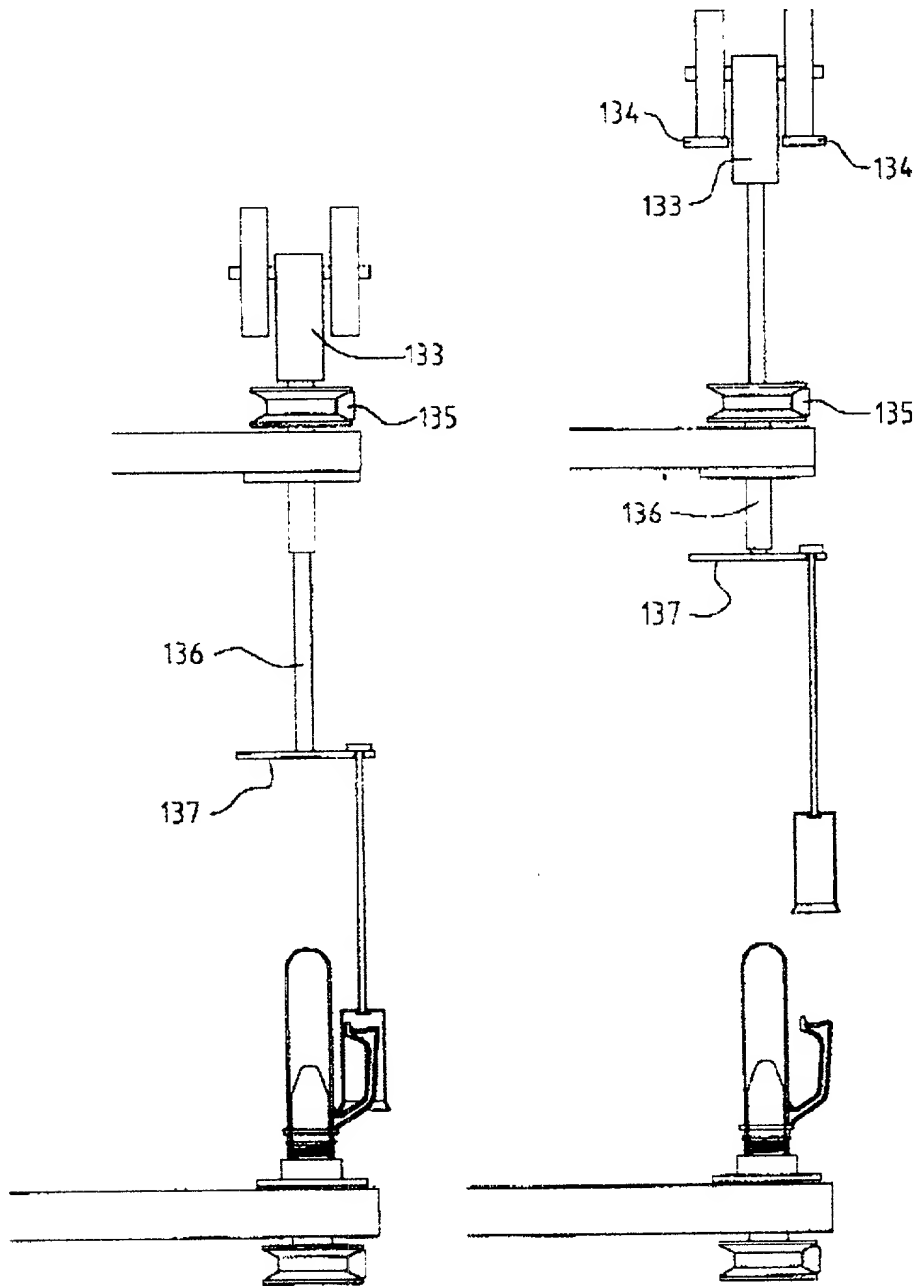


Fig. 11

12/39

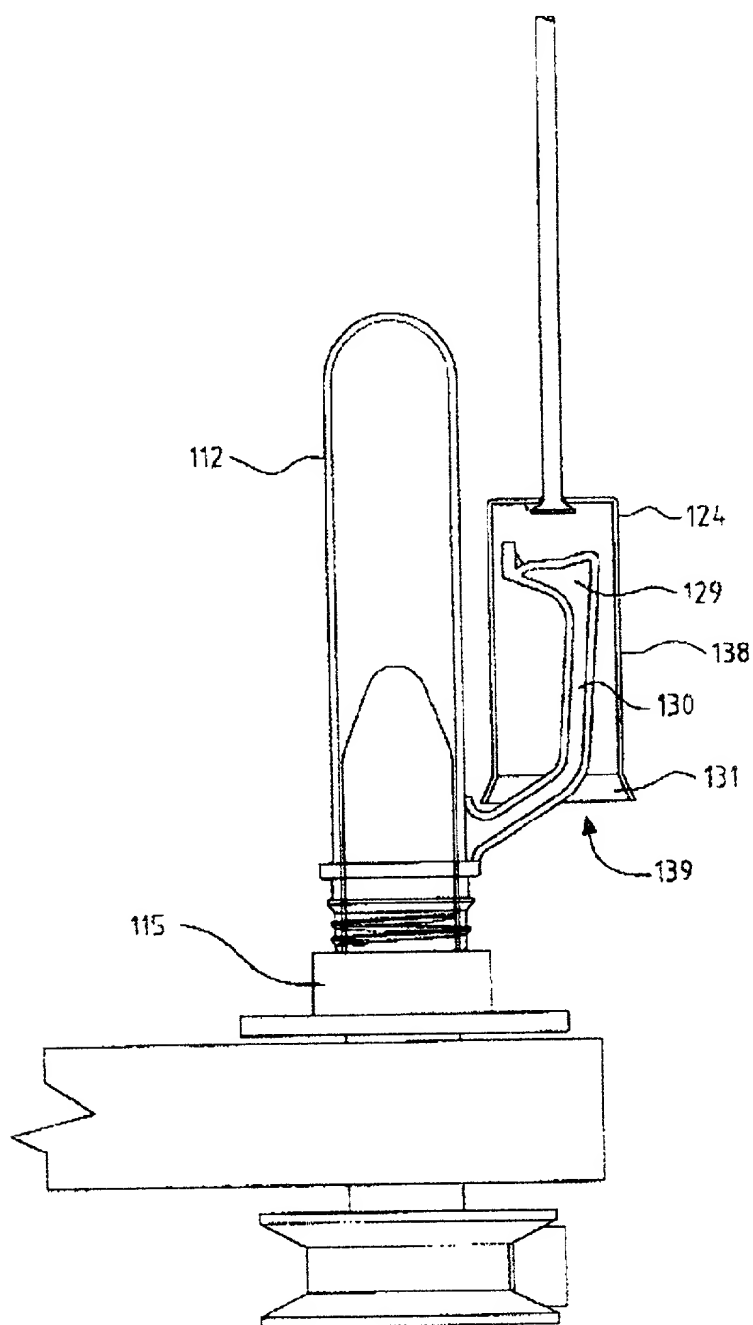


Fig. 12

13/39

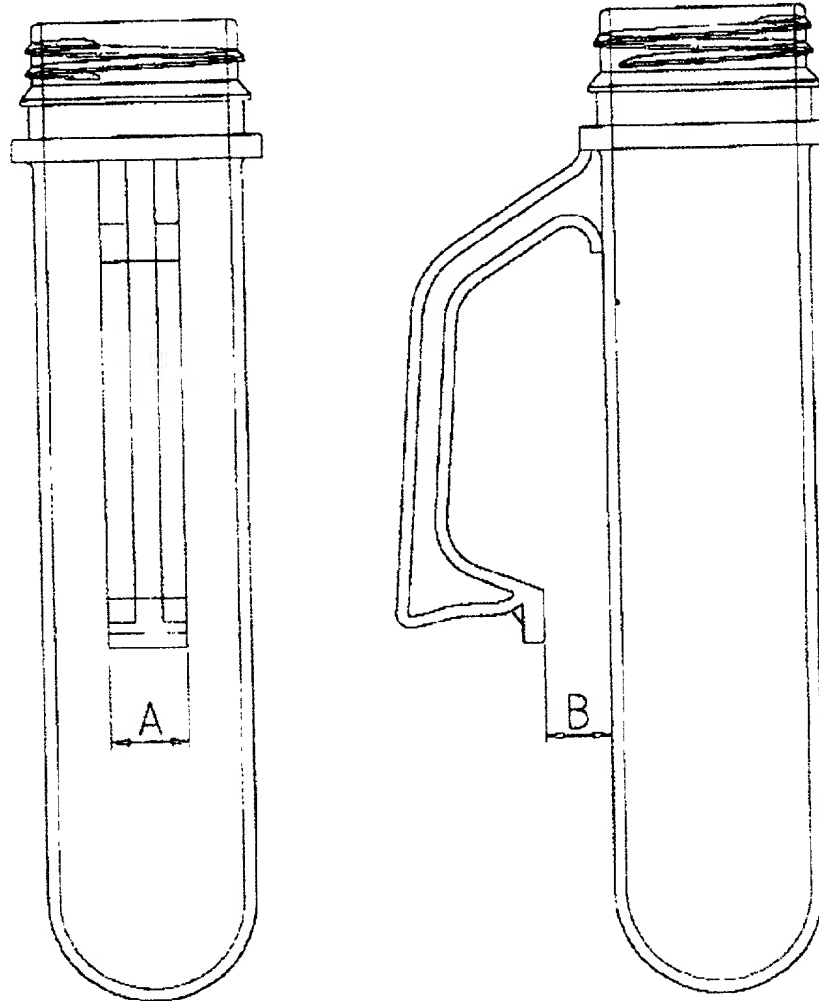


Fig. 13

14/39

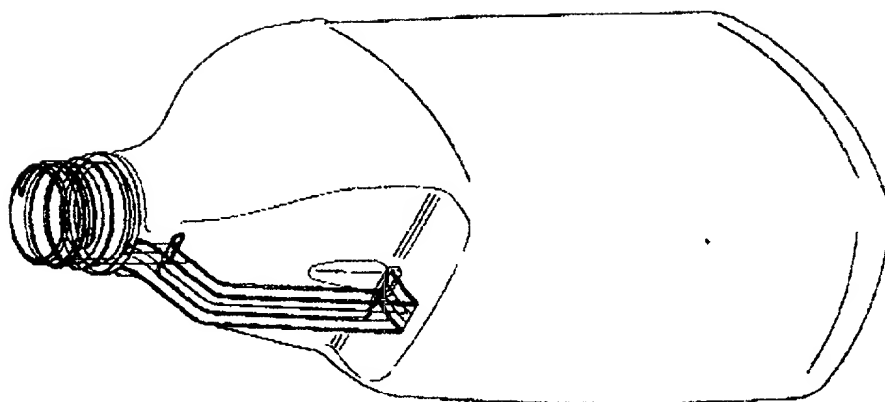


Fig. 15

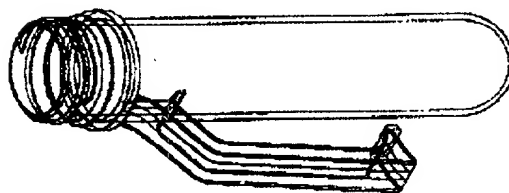


Fig. 14

15/39

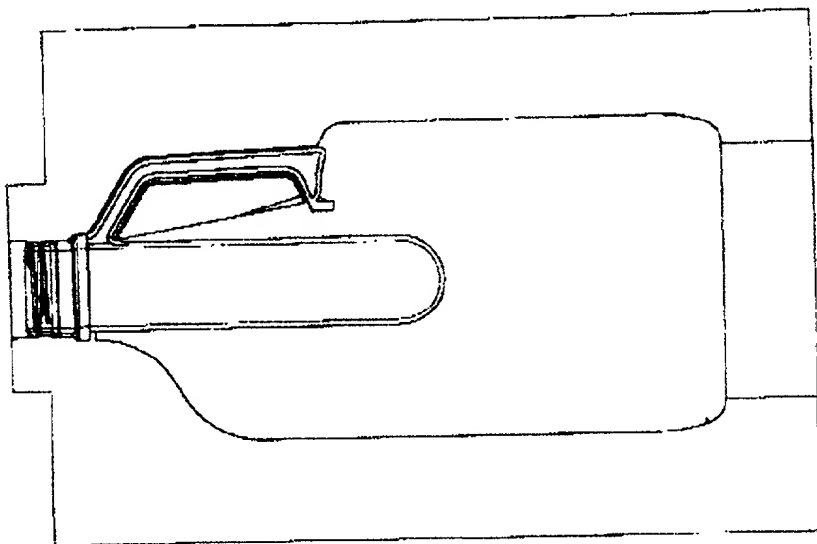


Fig. 17

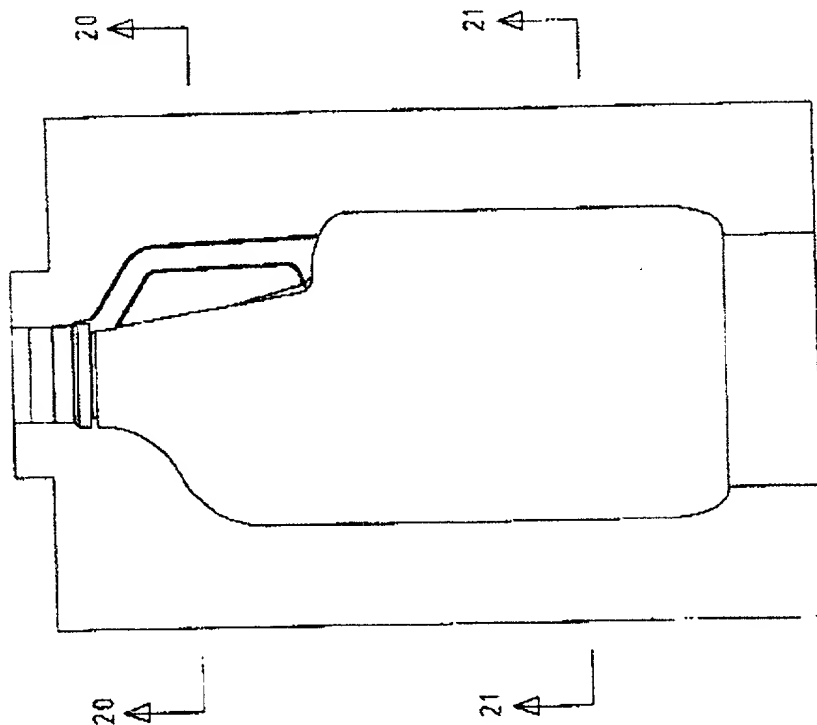


Fig. 16

16/39

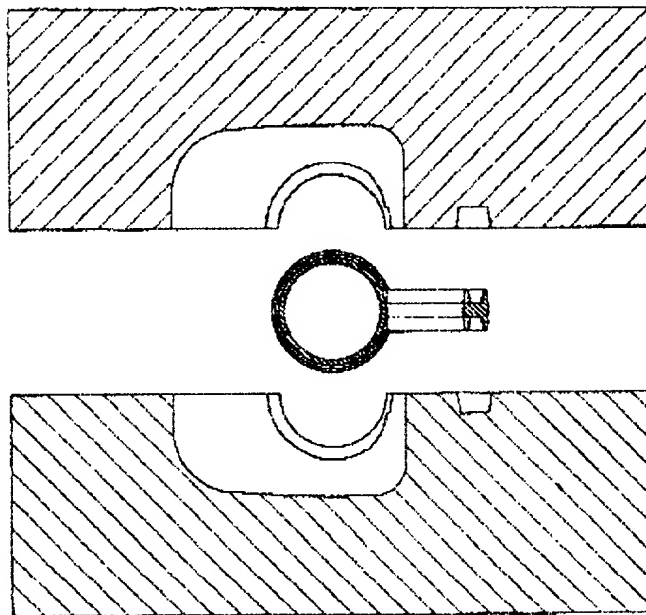


Fig. 18

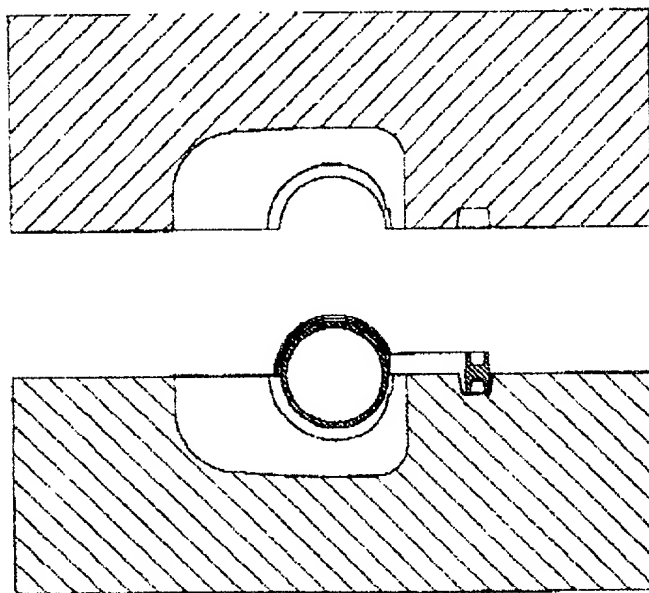


Fig. 19

17/39

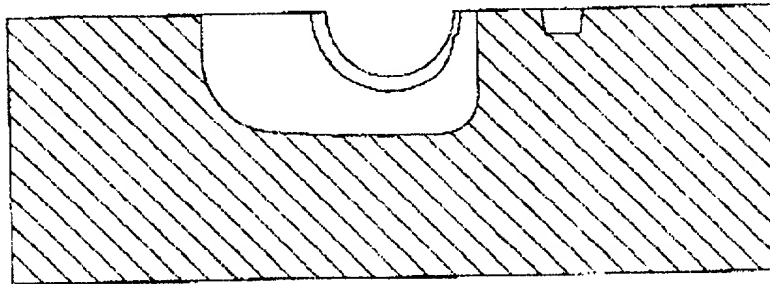


Fig. 20

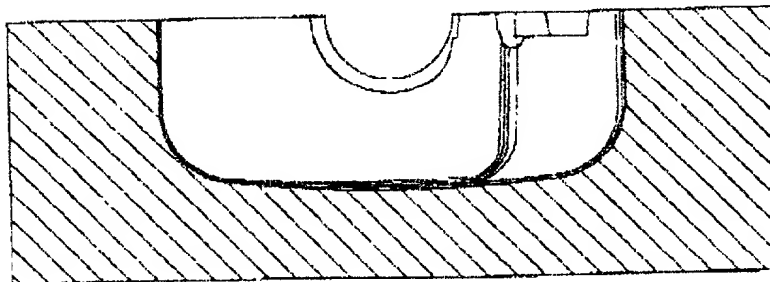


Fig. 21

18/39

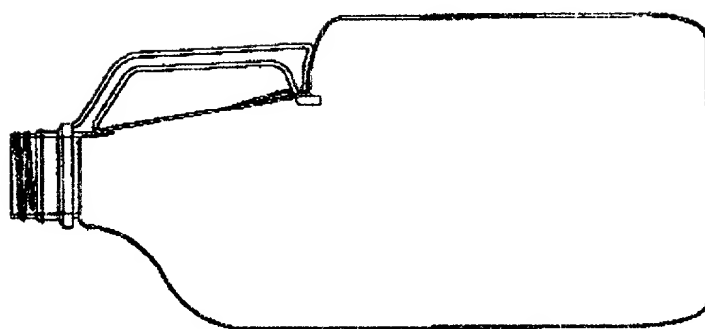


Fig. 22

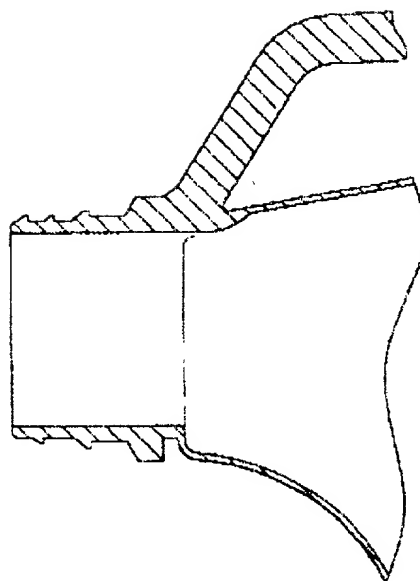


Fig. 23

09/581956

19/39

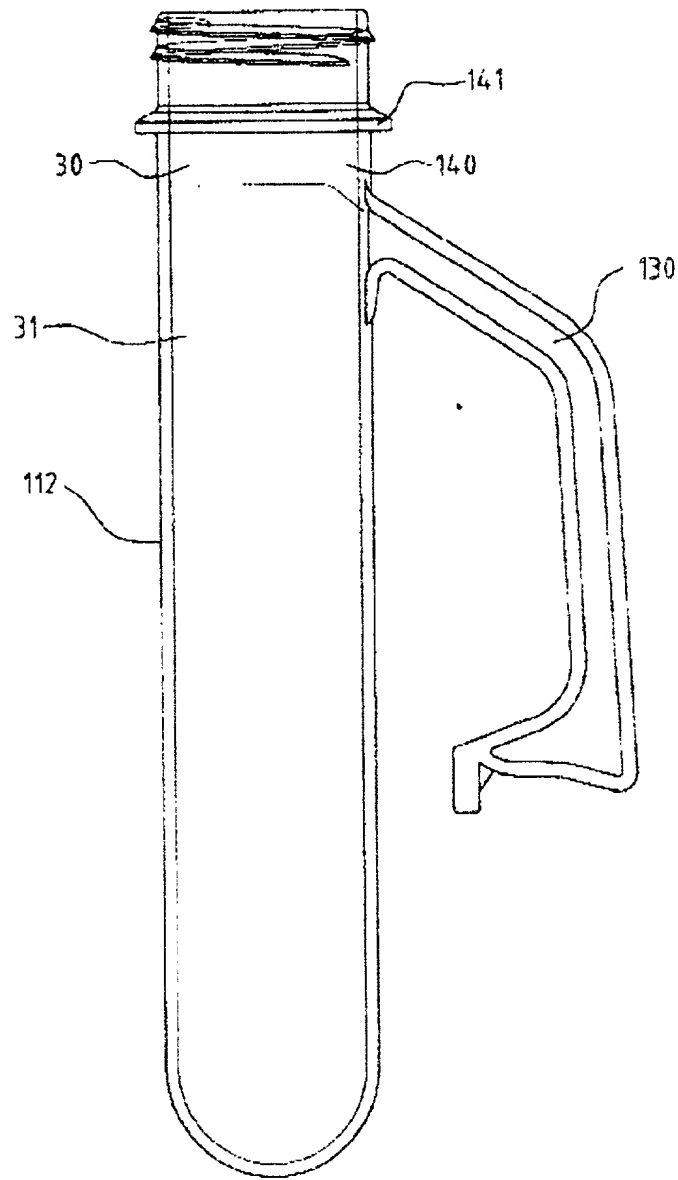


Fig. 24

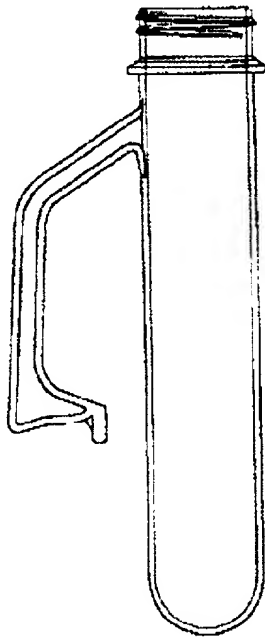


Fig. 25

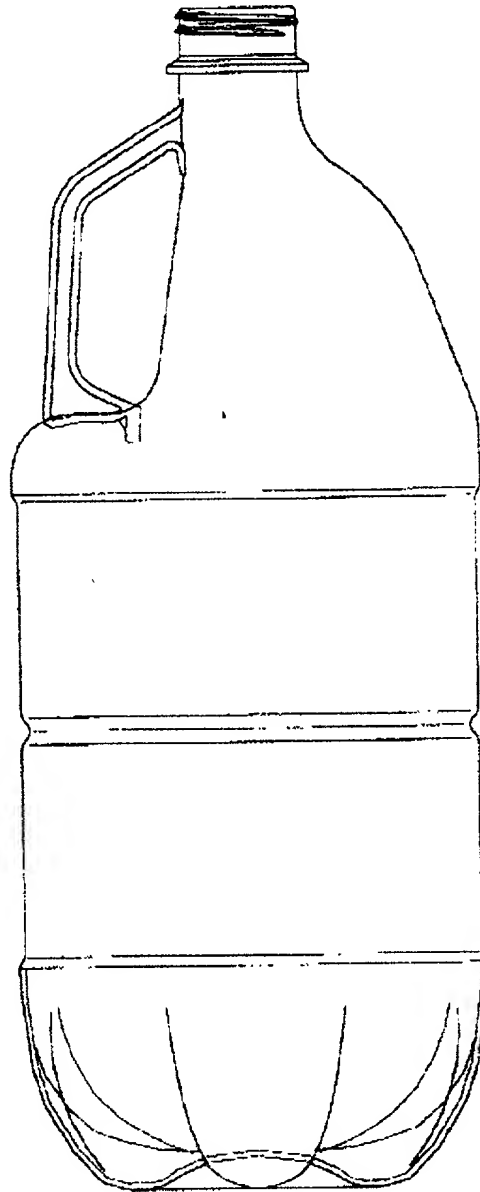


Fig. 26

21/39

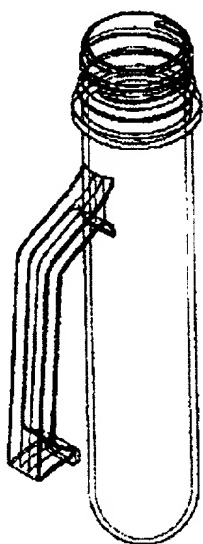


Fig. 27

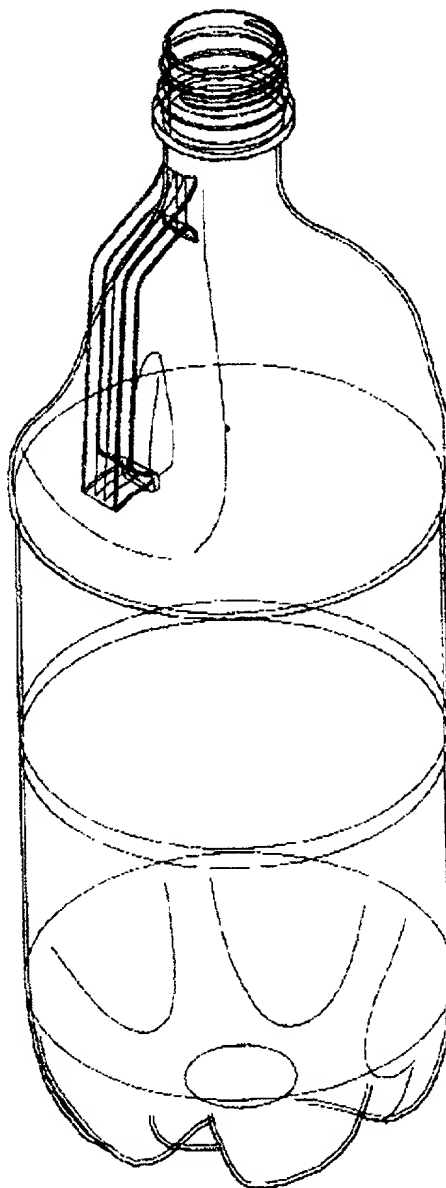


Fig. 28

22/39

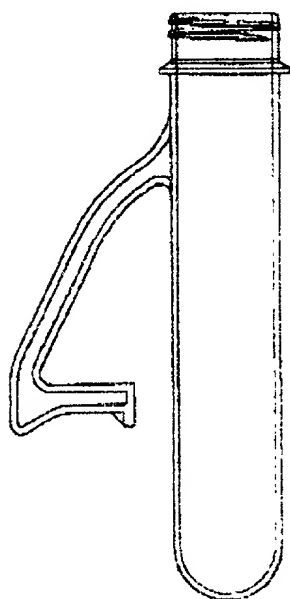


Fig. 29

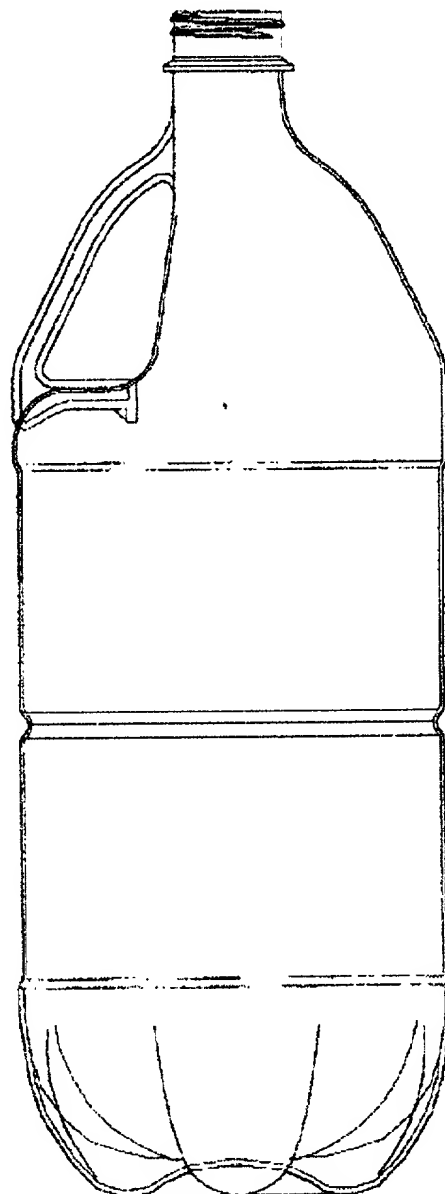


Fig. 30

23/39

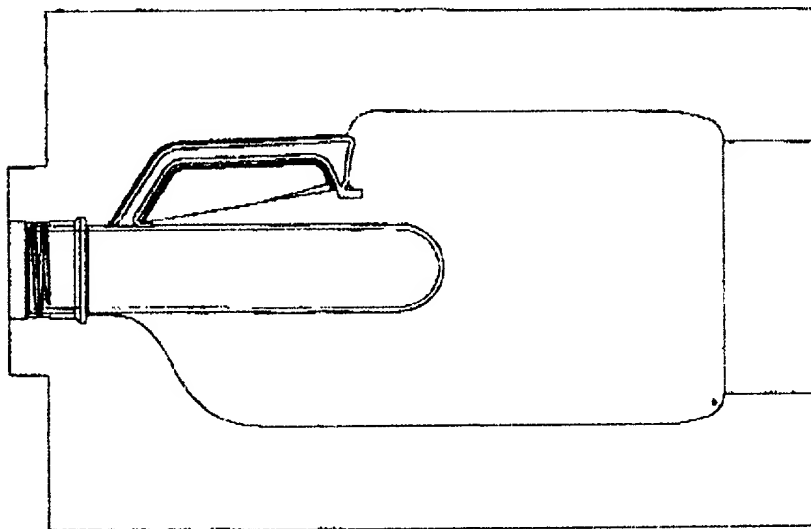


Fig. 32

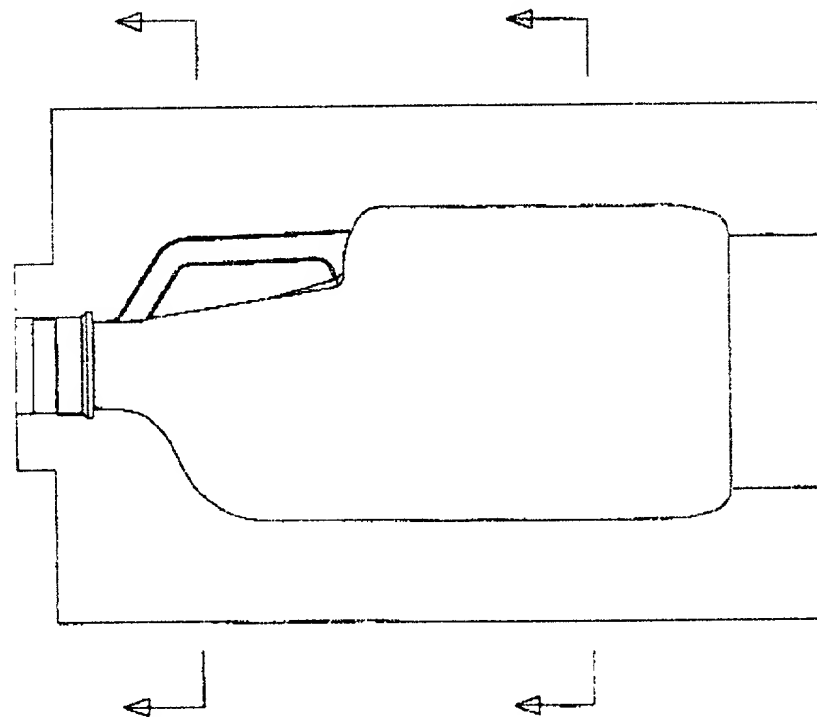


Fig. 31

24/39

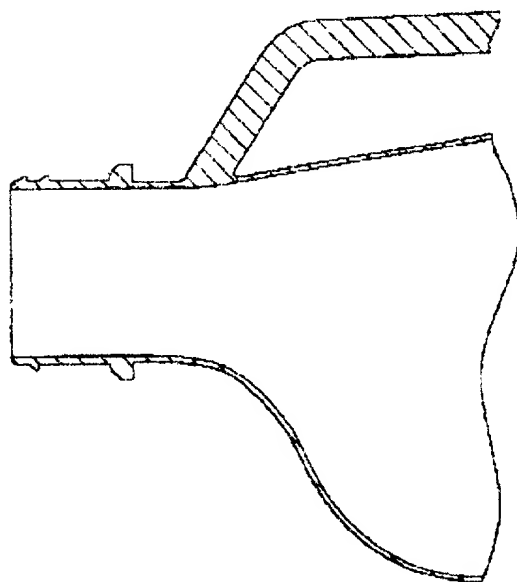


Fig. 34

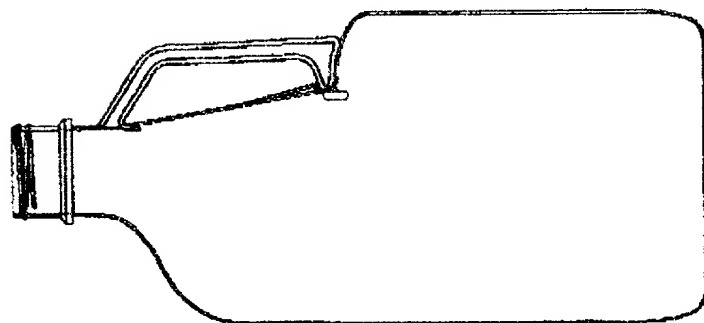


Fig. 33

25/39

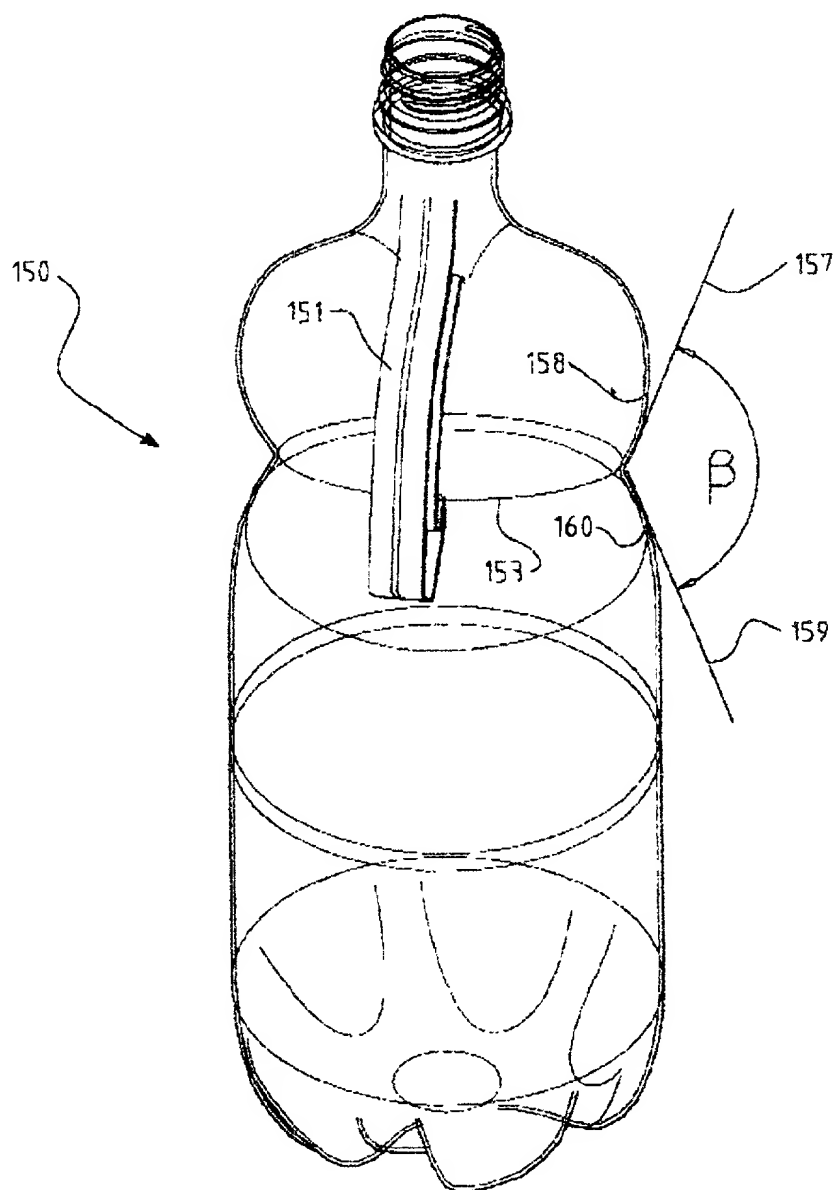


Fig. 35

WO 99/30883

PCT/AU98/01039

26/39

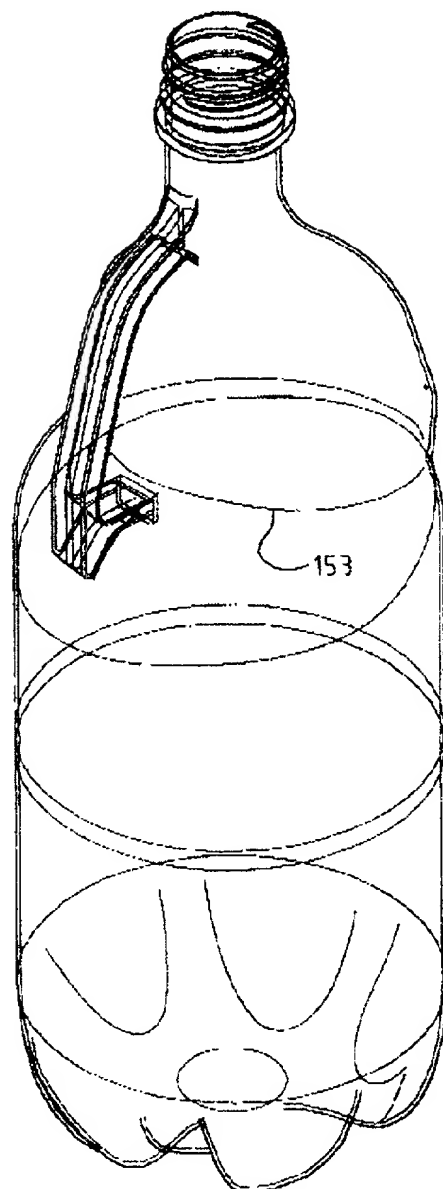


Fig. 36

WO 99/30883

PCT/AU98/01039

27/39

150




Fig. 39

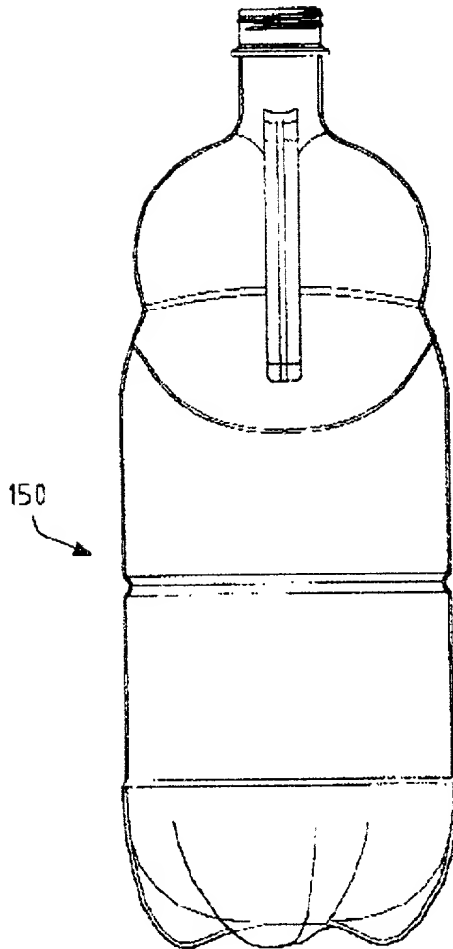


Fig. 37

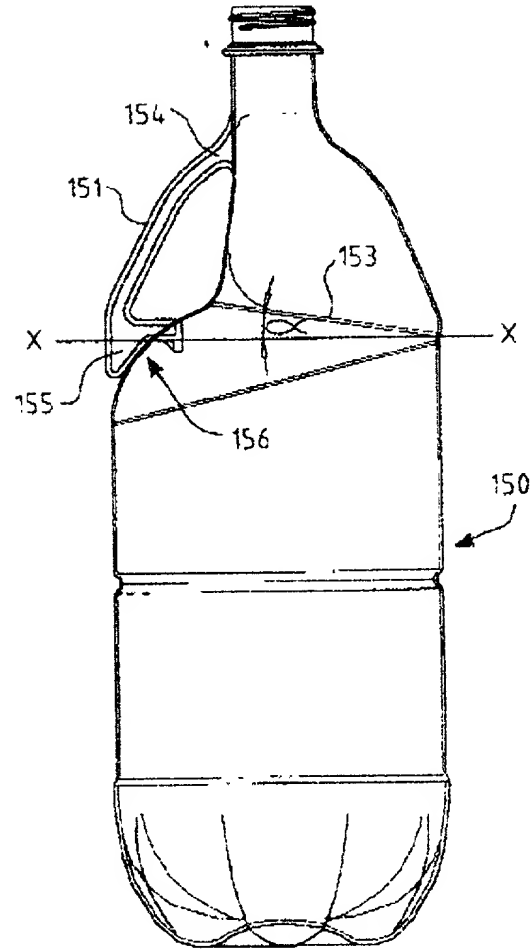


Fig. 38

WO 99/30883

09/581956
PCT/AU98/01039

28/39

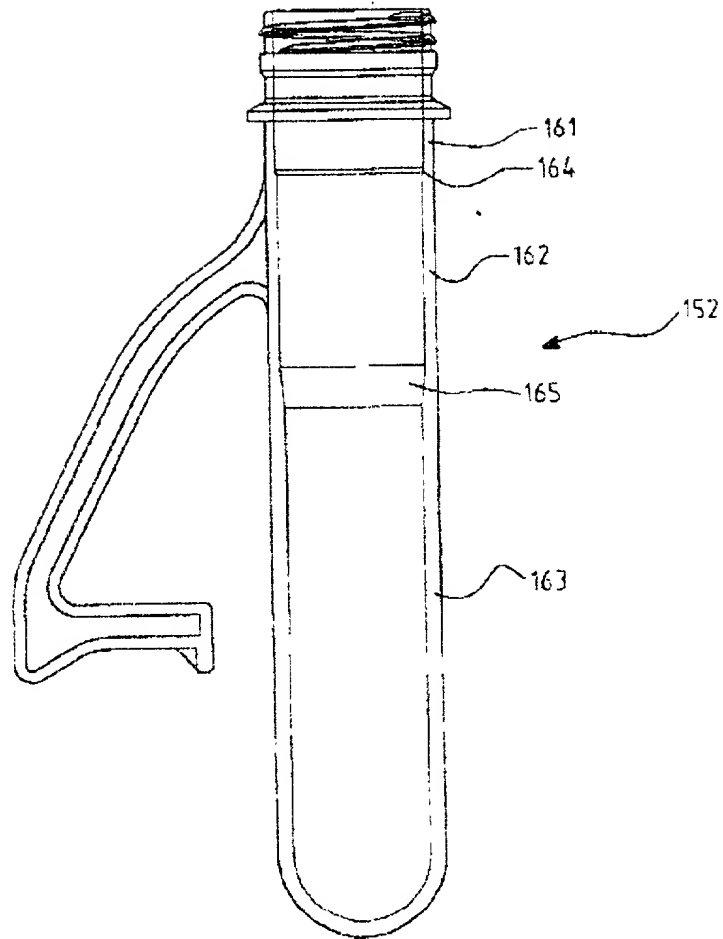


Fig. 40

09/581956

PCT/AU98/01039

WO 99/30883

29/39

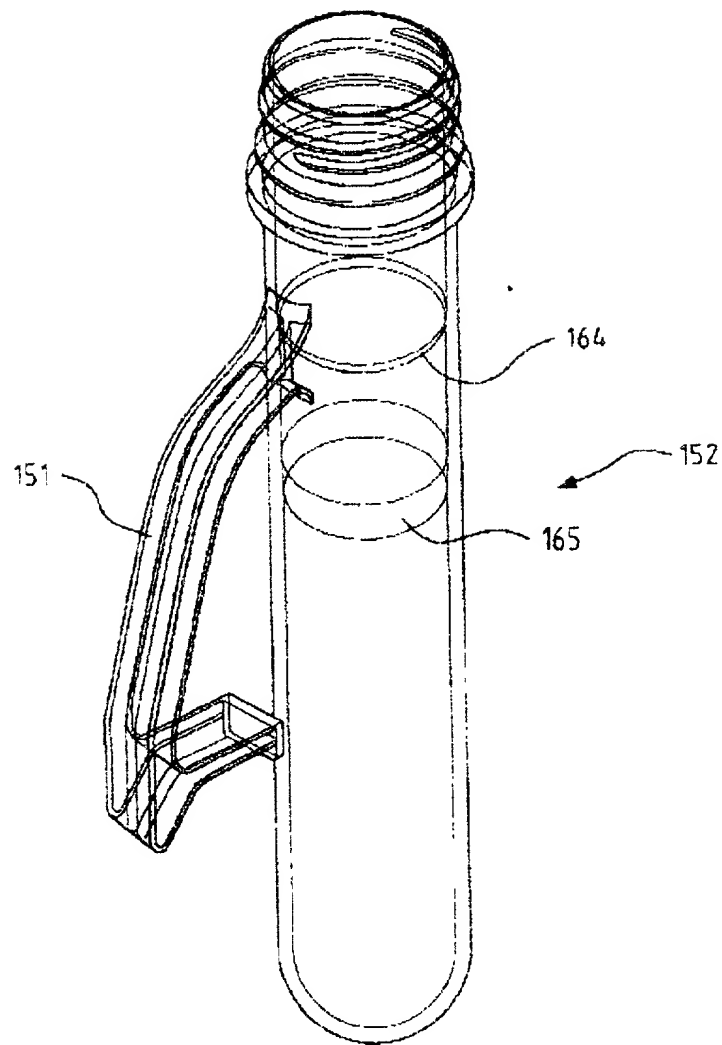


Fig. 41

WO 99/30883

PCT/AU98/01039

30/39

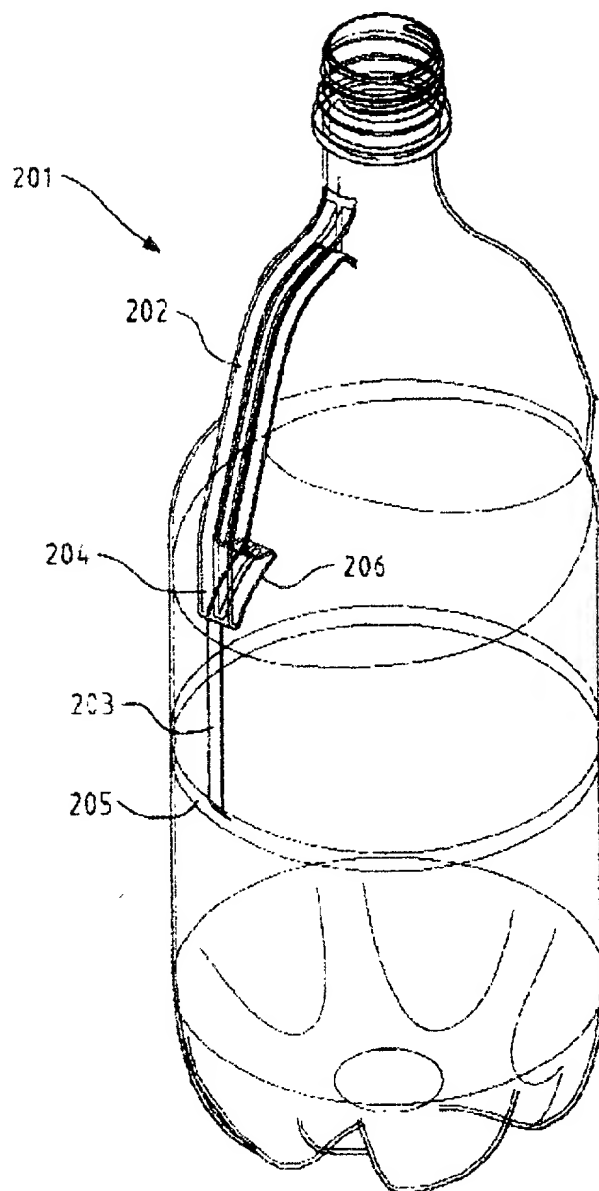


Fig. 42

WO 99/30883

09/581956
PCT/AU98/01039

31/39

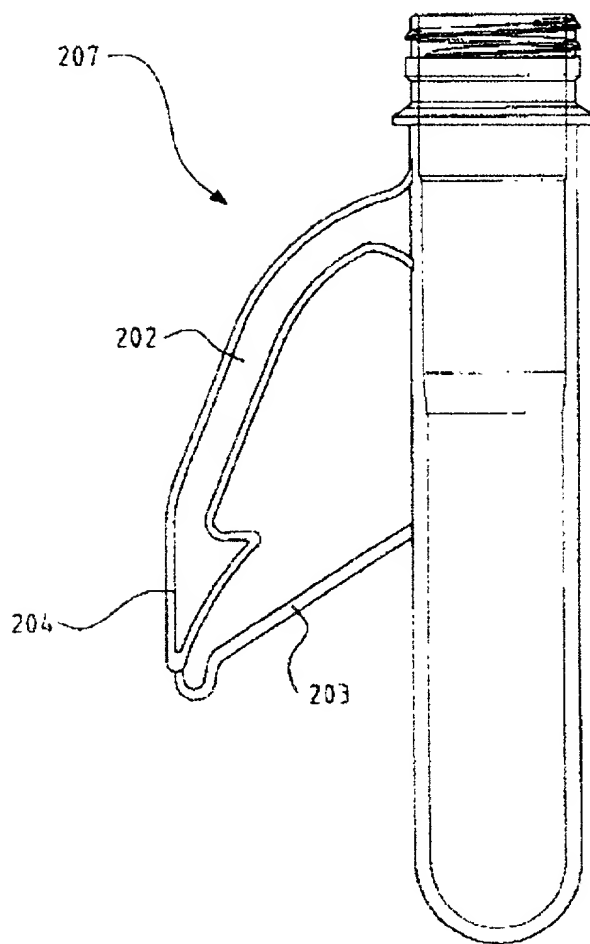


Fig. 43

WO 99/30883

09/581956
PCT/AU98/01039

32/39

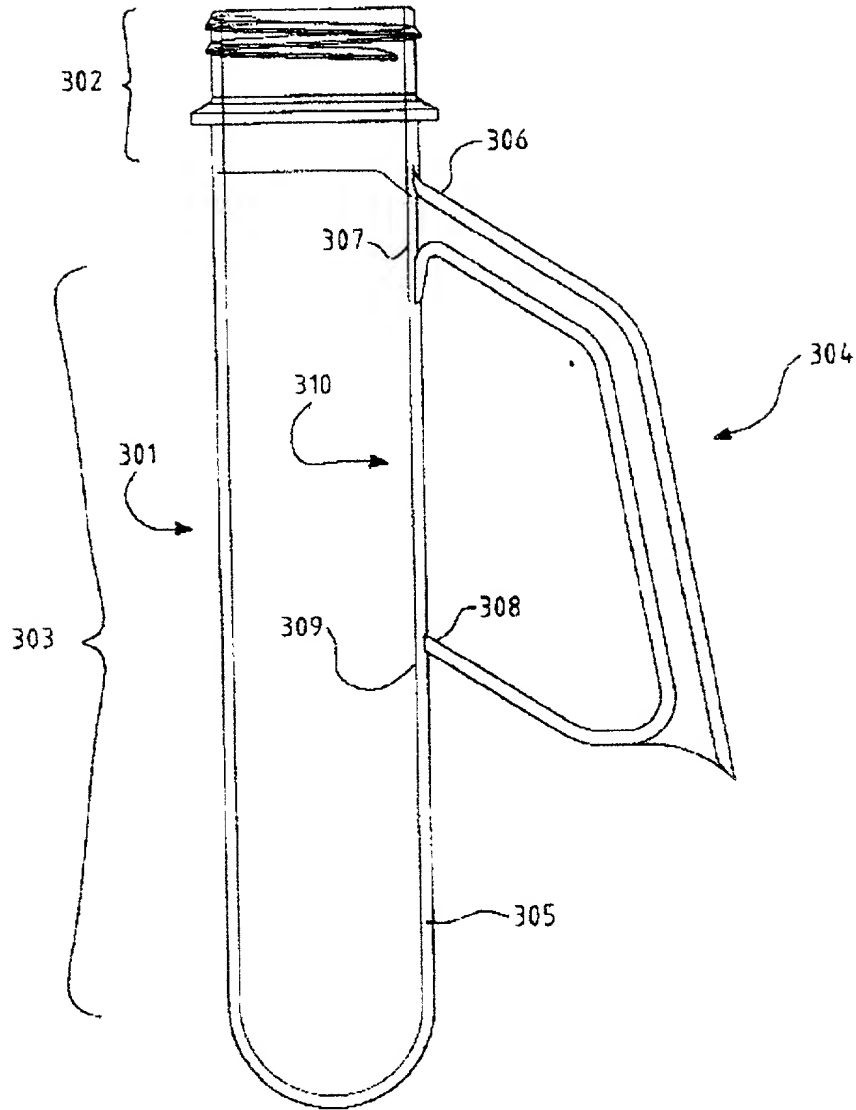


Fig. 44

09/581956

PCT/AU98/01039

WO 99/30883

33/39

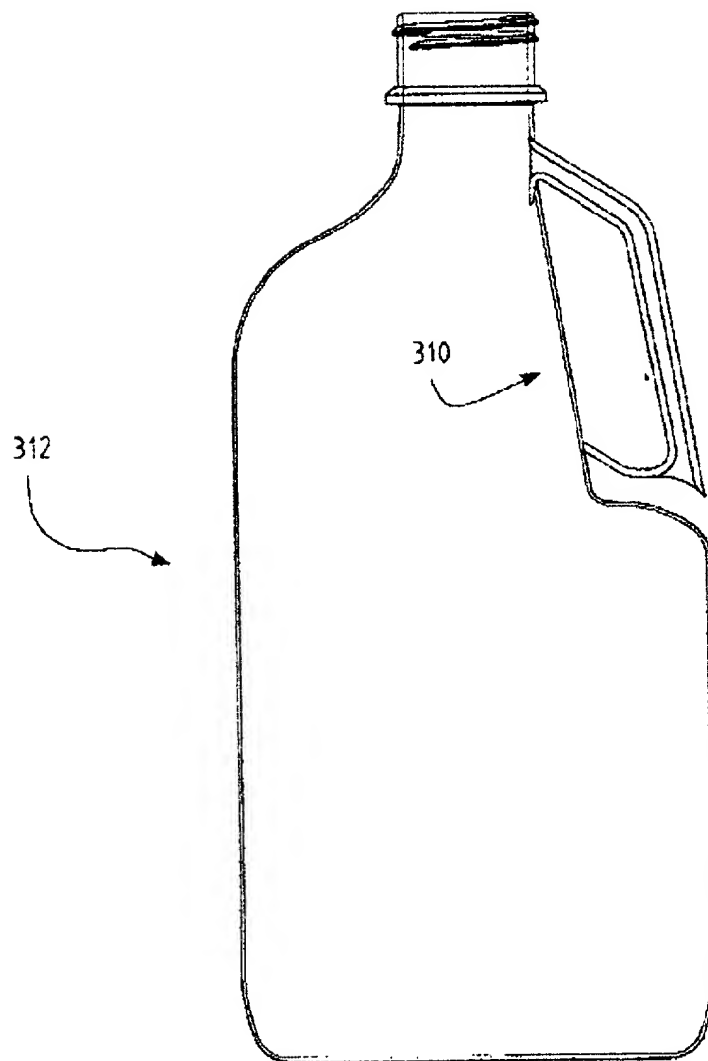


Fig. 45

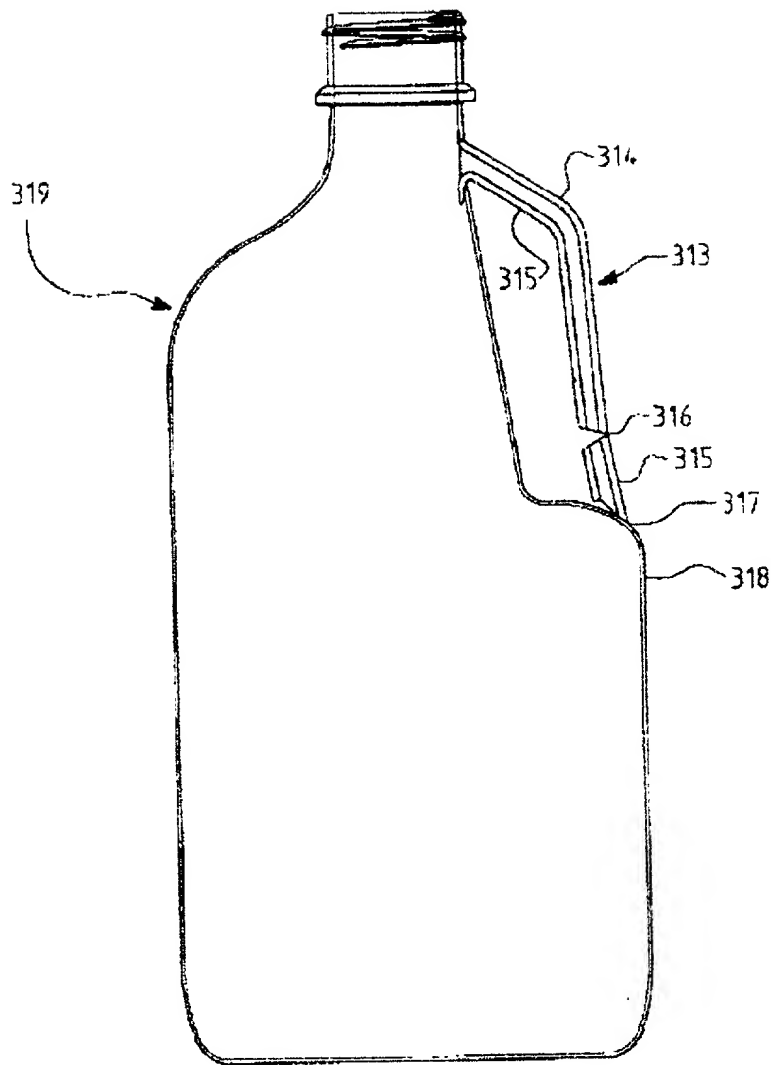


Fig. 46

09/581956

PCT/AU98/01039

WO 99/30883

35/39

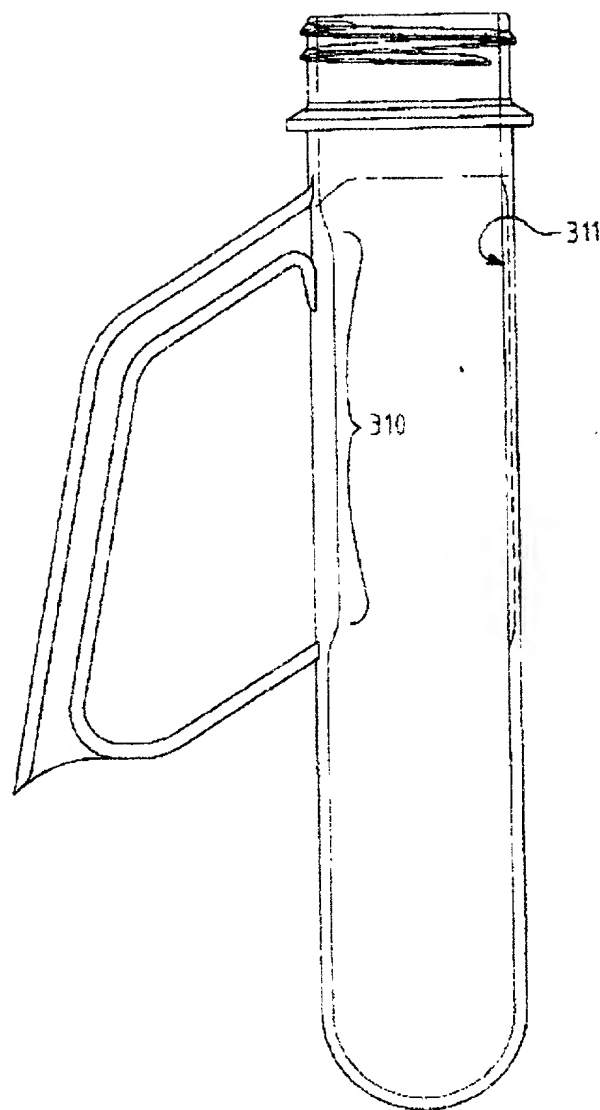


Fig. 47

36/39

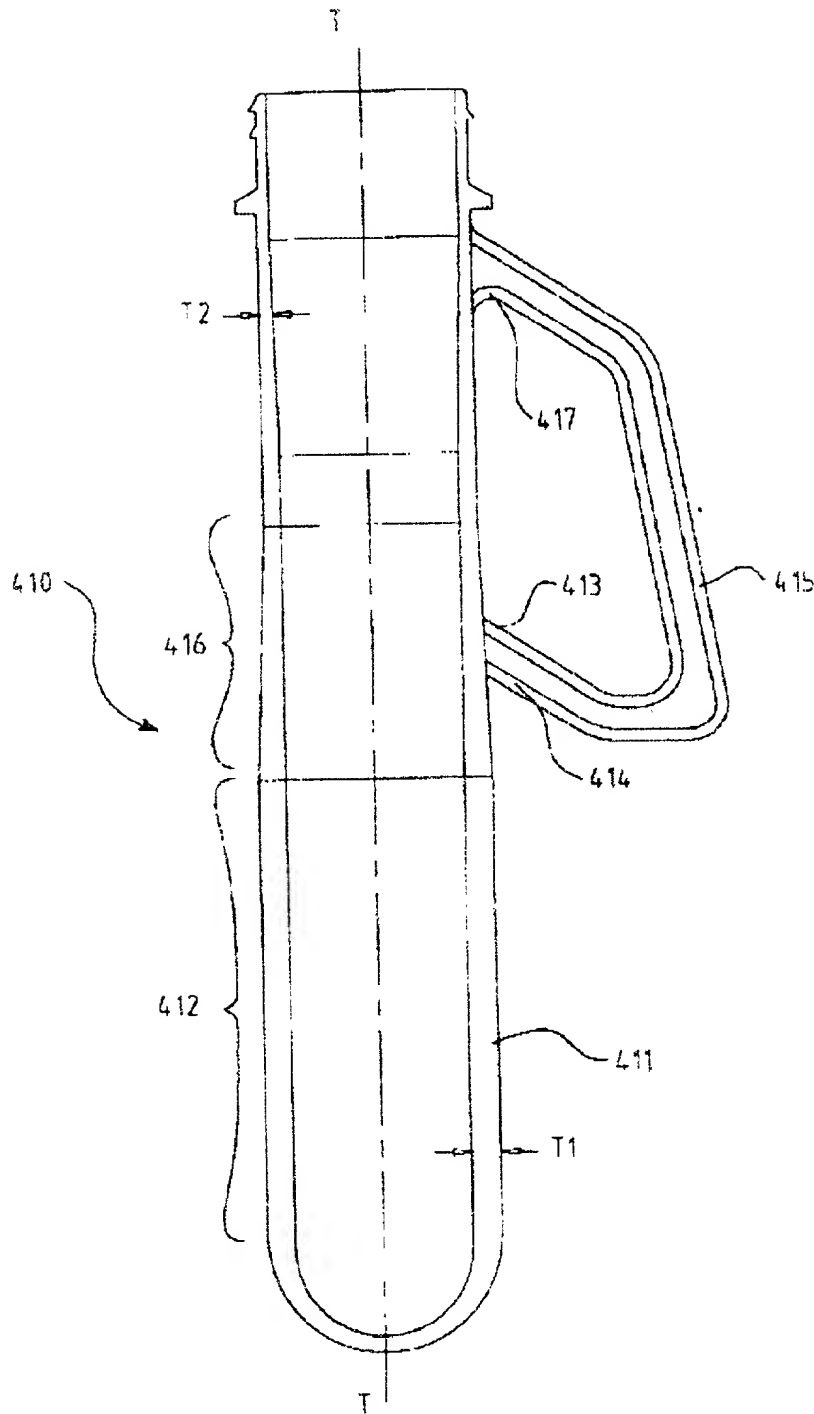


Fig. 48

09/581956

PCT/AU98/01039

WO 99/30883

37/39

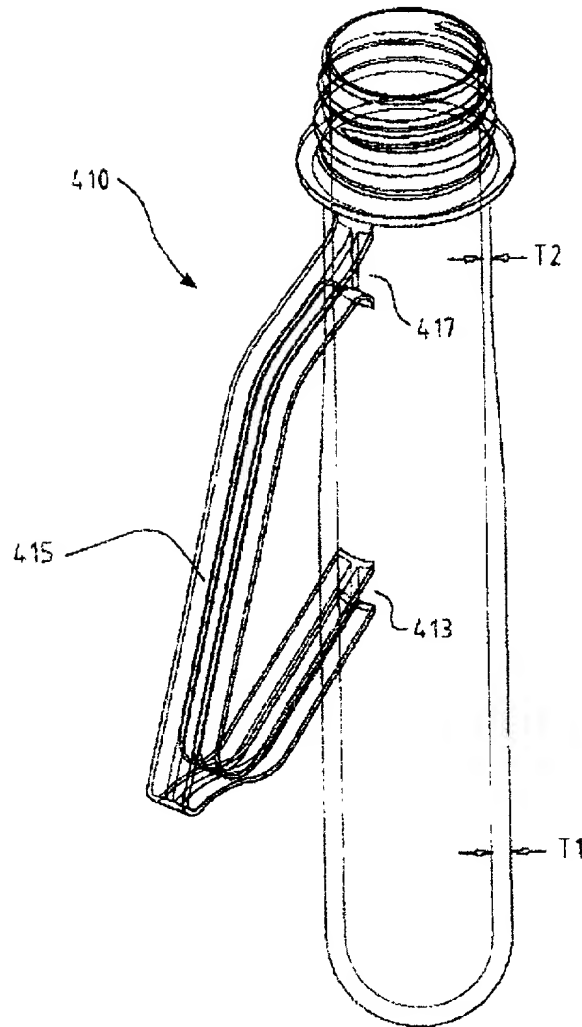


Fig. 49

SUBSTITUTE SHEET (Rule 26) (RO/AU)

WO 99/30883

09/581956
PCT/AU98/01039

38/39

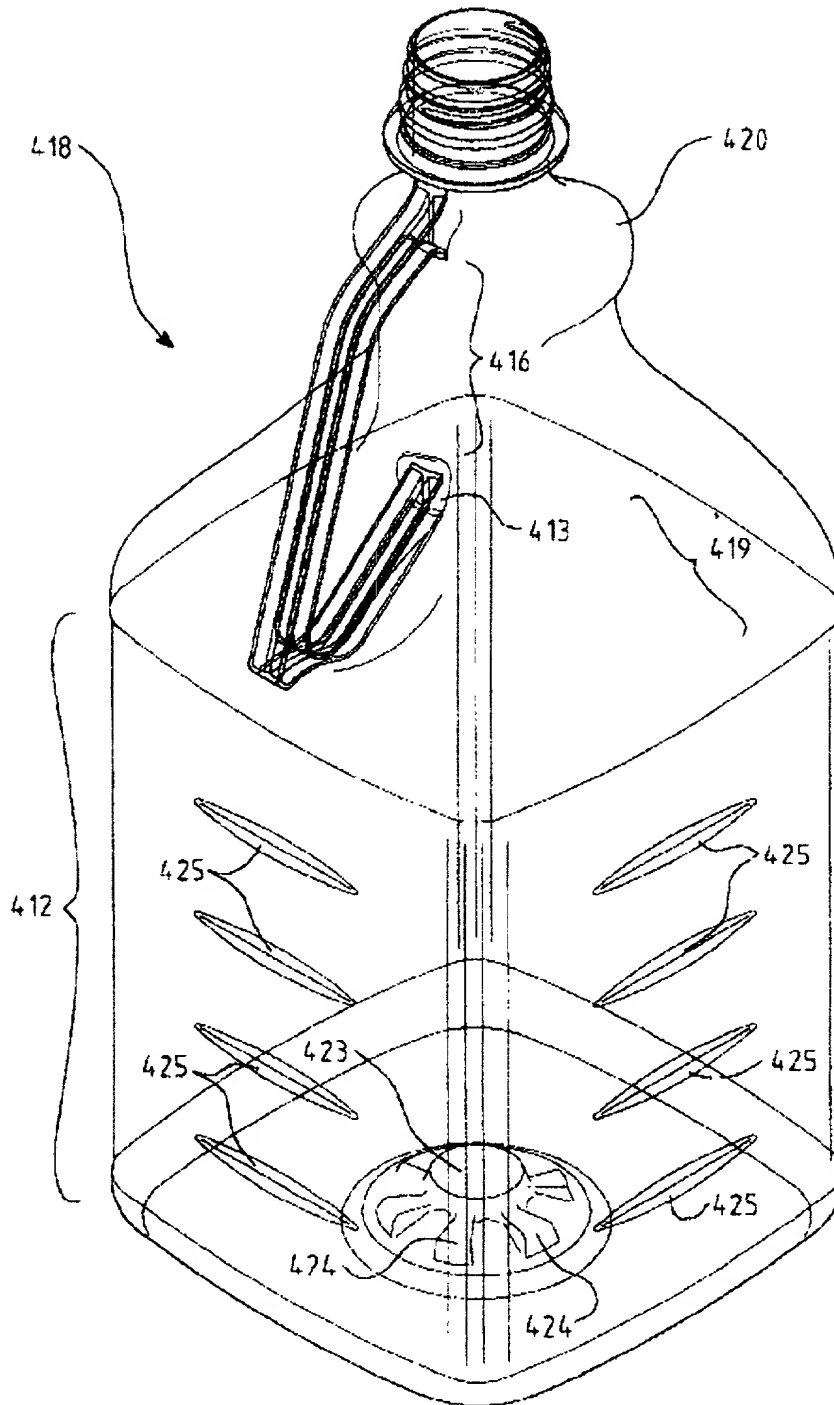


Fig. 50

09/581956
PCT/AU98/01039

WO 99/30883

39/39

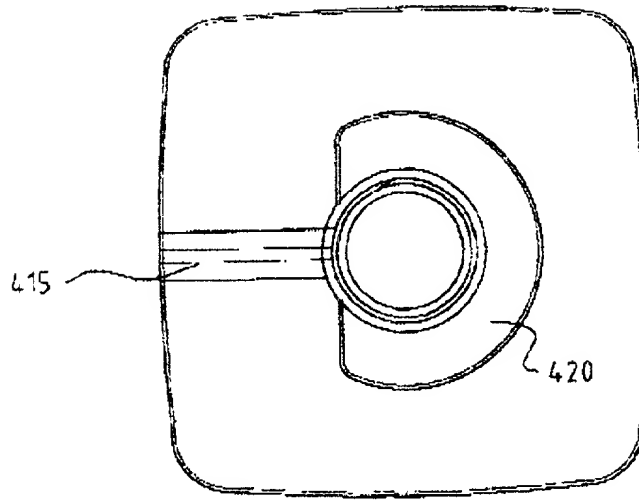


Fig. 51

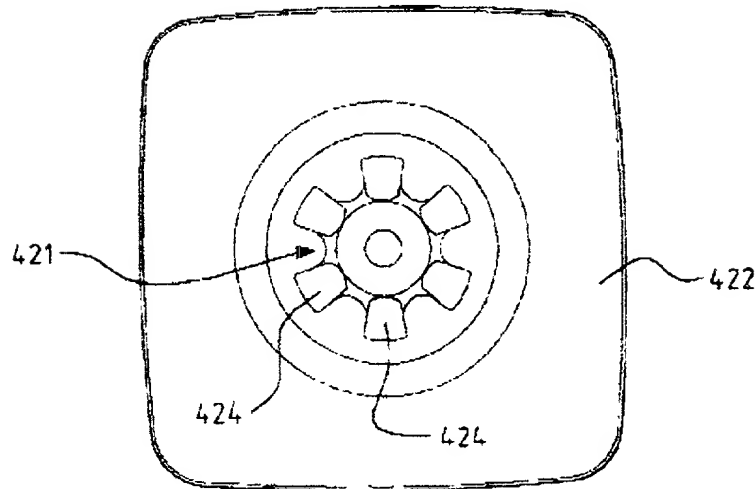


Fig. 52

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☐ Declaration Submitted with Initial Filing OR ☒ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number **WDMR-0030S**

First Named Inventor **G. Beale**

COMPLETE IF KNOWN

Application Number **09/581,956**

Filing Date **June 16, 2000**

Group Art Unit **Unknown**

Examiner Name **Unknown**

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**CONTAINER WITH MULTIPLE INTEGRAL CONNECTION HANDLE,
PREFORM AND METHOD OF MANUFACTURE**

the specification of which (Title of the Invention)

☐ is attached hereto
OR

☒ was filed on (MM/DD/YYYY) **12/17/1998** as ~~U.S. PATENT APPLICATION~~ PCT International

Application Number **PCT/AU98/01039** and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PP 0982	Australia	12/17/1997	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PP 3441	Australia	05/08/1998	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PP 6803	Australia	10/29/1998	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/AU98/01039	12/17/1999	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to:

☐ Customer Number
or Bar Code Label

007663

OR ☐ Correspondence address below

Name	Lowell Anderson				
Address	STETINA BRUNDA GARRED & BRUCKER				
Address	24221 Calle de la Louisa, 4th Floor				
City	Laguna Hills	State	CA	ZIP	92653-7602
Country	United States	Telephone	(949) 855-1246	Fax	(949) 855-6371

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:


☐ A petition has been filed for this unsigned inventor

Given Name (first and middle if any)

Family Name or Surname

Glenn Robert

Beale

Inventor's Signature					Date	12/19/2000	
Residence: City	Kings Langley	State	NSW	Country	Australia	Citizenship	AU
Post Office Address	9 Conway Place						
Post Office Address							
City	Kings Langley	State	NSW	ZIP	2147	Country	Australia

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (11-96)

Approved for use through 6/30/99. OMB 0651-0035

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY OR AUTHORIZATION OF AGENT

Application Number	09/581,956
Filing Date	June 16, 2000
First Named Inventor	GLENN ROBERT BEALE
Group Art Unit	UNKNOWN
Examiner Name	UNKNOWN
Attorney Docket Number	WDUMR-003US

I hereby appoint:

☒ Practitioners at Customer Number

007663

Place Customer
Number Bar Code
Label here

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

<input checked="" type="checkbox"/> Firm or Individual Name	LOWELL ANDERSON				
	STETINA BRUNDA GARRED & BRUCKER				
Address	24221 CALLE DE LA LOUISA				
Address	4TH FLOOR				
City	LAGUNA HILLS	State	CA	ZIP	92653
Country	U.S.A.				
Telephone	(949) 855-1246	Fax	(949) 855-1246		

I am the:

☐ Applicant.

☒ Assignee of record of the entire interest
Certificate under 37 CFR 3.73(b) is enclosed

SIGNATURE of Applicant or Assignee of Record

Name	GLENN ROBERT BEALE, PRESIDENT DIRECTOR BEALETEC PTY LTD.
Signature	<i>Glenn Beale</i>
Date	19/9/2000 19 TH SEPTEMBER 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.